


# Draw

Indoor Lighting - Industrial Lighting



## Colour Options

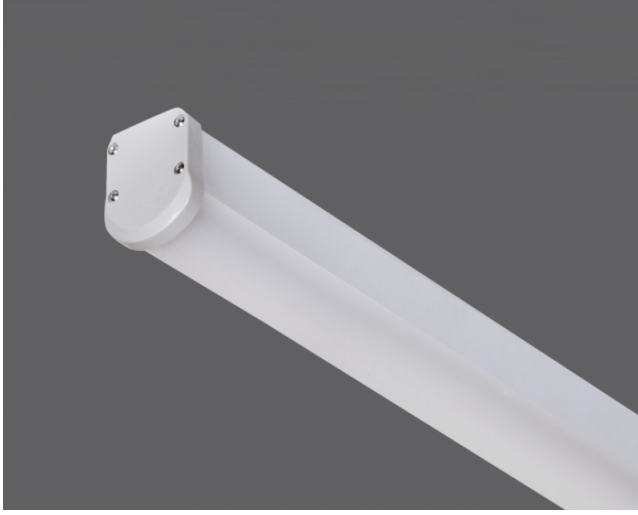

Ral 9006

## TECHNICAL INFORMATION

<b>Housing</b>	CO-EX Extrusion PC Profile
<b>Side Cover</b>	PC Injection
<b>Diffuser</b>	PC Opal Diffuser

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	17-51W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Surface Mounted
<b>Mounting Apparatus</b>	Metal Bracket

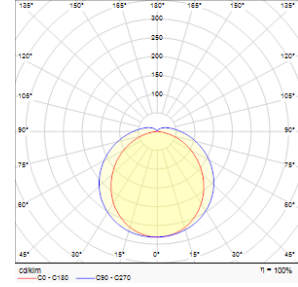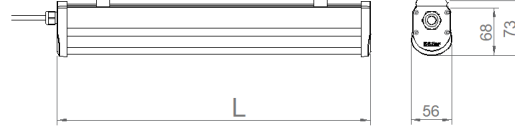

Order Code	W	Lm	CCT	CRI	L (mm)
07105.06.30.021	17	2100	3000	Ra>80	580
07105.06.40.022	17	2200	4000	Ra>80	580
07105.08.30.033	25	3300	3000	Ra>80	860
07105.08.40.034	25	3400	4000	Ra>80	860
07105.12.30.046	34	4600	3000	Ra>80	1140
07105.12.40.047	34	4700	4000	Ra>80	1140
07105.14.30.057	42	5700	3000	Ra>80	1420
07105.14.40.058	42	5800	4000	Ra>80	1420
07105.14.30.067	51	6700	3000	Ra>80	1420
07105.14.40.068	51	6800	4000	Ra>80	1420

