


Draw

Indoor Lighting - Industrial Lighting



Colour Options

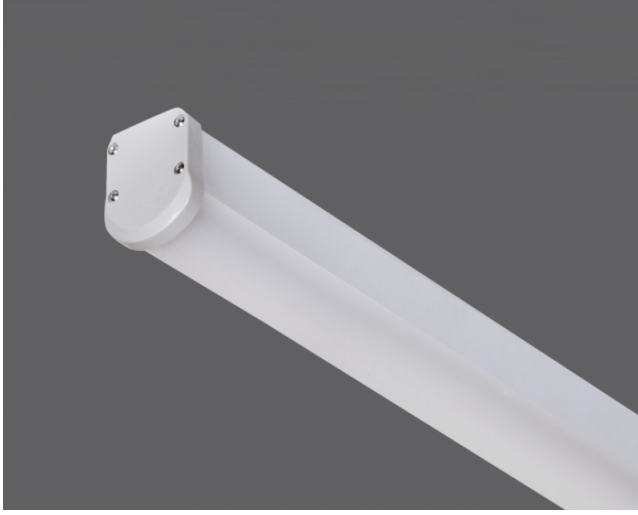

Ral 9006

TECHNICAL INFORMATION

Housing	CO-EX Extrusion PC Profile
Side Cover	PC Injection
Diffuser	PC Opal Diffuser

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	17-51W
Power Factor	>0.95
Light Source	Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Metal Bracket

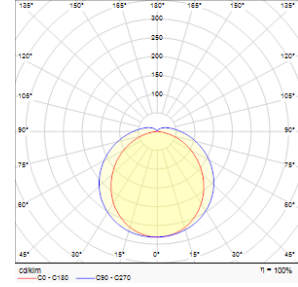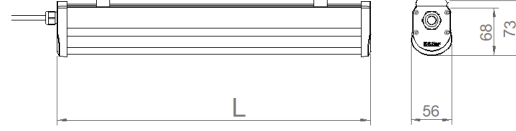

Order Code	W	Lm	CCT	CRI	L (mm)
07105.06.30.021	17	2100	3000	Ra>80	580
07105.06.40.022	17	2200	4000	Ra>80	580
07105.08.30.033	25	3300	3000	Ra>80	860
07105.08.40.034	25	3400	4000	Ra>80	860
07105.12.30.046	34	4600	3000	Ra>80	1140
07105.12.40.047	34	4700	4000	Ra>80	1140
07105.14.30.057	42	5700	3000	Ra>80	1420
07105.14.40.058	42	5800	4000	Ra>80	1420
07105.14.30.067	51	6700	3000	Ra>80	1420
07105.14.40.068	51	6800	4000	Ra>80	1420

