


Draw

Indoor Lighting - Industrial Lighting



Colour Options

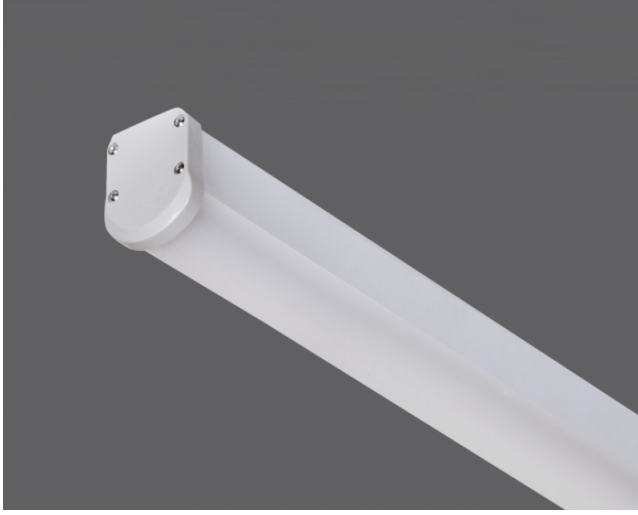

Ral 9006

TECHNICAL INFORMATION

Housing CO-EX Extrusion PC Profile
Side Cover PC Injection
Diffuser PC Opal Diffuser

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL

Power (W) 17-51W
Power Factor >0.95
Light Source Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour


OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)

- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- PIR Sensor

ASSEMBLY

Installation Type Surface Mounted
Mounting Apparatus Metal Bracket

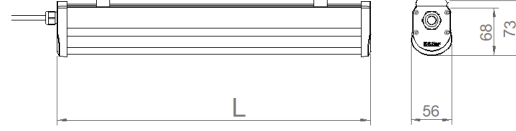

Order Code	W	Lm	CCT	CRI	L (mm)
07105.14.40.068	51	6800	4000	Ra>80	1420

