

Lightline - 043

Indoor Lighting - Pendant Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	Highly Transmissive Opal Diffuser
Dimensions(mm)	45(W) x 74(H)
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	22-44W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabbling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

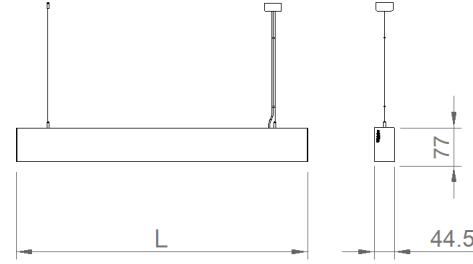

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.43.30.011	15	1100	3000	Ra>80	575	1,4
01180.43.40.012	15	1200	4000	Ra>80	575	1,4
01180.43.30.019	22	1900	3000	Ra>80	855	1,8
01180.43.40.020	22	2000	4000	Ra>80	855	1,8
01180.43.30.026	30	2600	3000	Ra>80	1135	2,0
01180.43.40.027	30	2700	4000	Ra>80	1135	2,0
01180.43.30.033	36	3300	3000	Ra>80	1415	2,4
01180.43.40.034	36	3400	4000	Ra>80	1415	2,4
01180.43.30.041	44	4000	3000	Ra>80	1695	2,8
01180.43.40.041	44	4100	4000	Ra>80	1695	2,8

