

Lightline - 049 D Direct

Indoor Lighting - Pendant Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Extruded Aluminium Profile
Side Cover	Aluminium Injection
Diffuser	Opal Diffuser with High Light Transmittance
Paint	Electrostatic Powder Paint
Dimensions(mm)	48(W) x 90(H)

OPTICAL SPECIFICATIONS

Optics	Direct
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	31-45W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Pendant
Mounting Apparatus	Height Adjustable Steel Wire

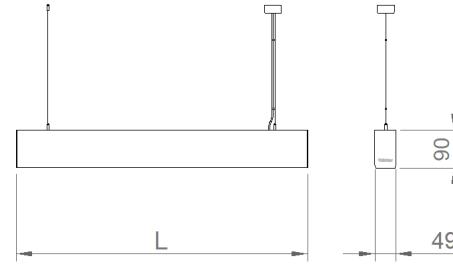

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.49.30.031	31	3000	3000	Ra>80	1135	2,6
01180.49.40.032	31	3240	4000	Ra>80	1135	2,6
01180.49.30.038	37	3760	3000	Ra>80	1415	3,2
01180.49.40.039	37	3960	4000	Ra>80	1415	3,2
01180.49.30.046	45	4575	3000	Ra>80	1695	3,9
01180.49.40.047	45	4815	4000	Ra>80	1695	3,9

