

# Lightline - 049 D Direct

Indoor Lighting - Pendant Lighting



Colour Options



## TECHNICAL INFORMATION

Housing  
Side Cover  
Diffuser  
Paint  
Dimensions(mm)

## OPTICAL SPECIFICATIONS

Optics  
Light Output Angle  
UGR Value  
CRI  
Color Bin Value

## ELECTRICAL


Power (W)  
Power Factor  
Light Source  
Cabling  
Input Voltage  
LED Driver  
Ambient Temperature  
LED Lifetime L80B50

## OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

## ASSEMBLY

Installation Type Pendant  
Mounting Height Adjustable Steel Wire  
Apparatus

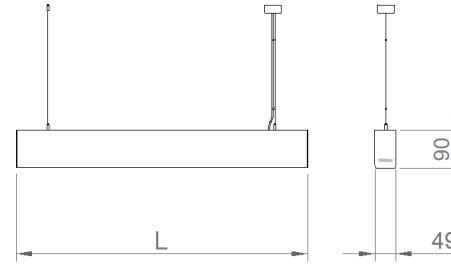

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.49.30.031	31	3000	3000	Ra>80	1135	2,6
01180.49.40.032	31	3240	4000	Ra>80	1135	2,6
01180.49.30.038	37	3760	3000	Ra>80	1415	3,2
01180.49.40.039	37	3960	4000	Ra>80	1415	3,2
01180.49.30.046	45	4575	3000	Ra>80	1695	3,9
01180.49.40.047	45	4815	4000	Ra>80	1695	3,9

