

Lightline - 049 D Direct

Indoor Lighting - Pendant Lighting



Colour Options



TECHNICAL INFORMATION

Housing
Side Cover
Diffuser
Paint
Dimensions(mm)

OPTICAL SPECIFICATIONS

Optics
Light Output Angle
UGR Value
CRI
Color Bin Value

ELECTRICAL


Power (W)
Power Factor
Light Source
Cabling
Input Voltage
LED Driver
Ambient Temperature
LED Lifetime L80B50

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Pendant
Mounting Height Adjustable Steel Wire
Apparatus

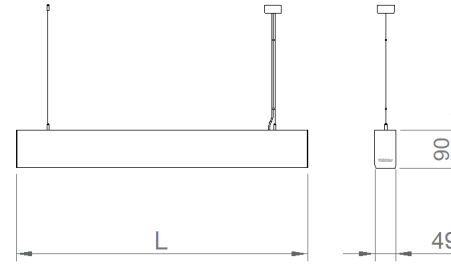

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.49.30.038	37	3760	3000	Ra>80	1415	3,2

