

# LIGHTLINE-049 D/I


# 01180


## Indoor Pendant - Direct/Indirect Lighting Fixture

The Lightline 49 Series stands out with its direct and indirect lighting characteristics. Thanks to the indirect light it directs towards the ceiling, it creates a more balanced, spacious, and homogeneous lighting effect in the space.

With its opal diffuser, it provides a soft and comfortable distribution of direct light, while its indirect component enhances the perception of space and increases visual comfort. It offers project-specific solutions with different power, profile lengths, color temperature, and control options. The office is suitable for pendant mounting applications for both functional and atmospheric lighting in commercial and architectural projects.

RAL 9016 RAL 9005 RAL 9006

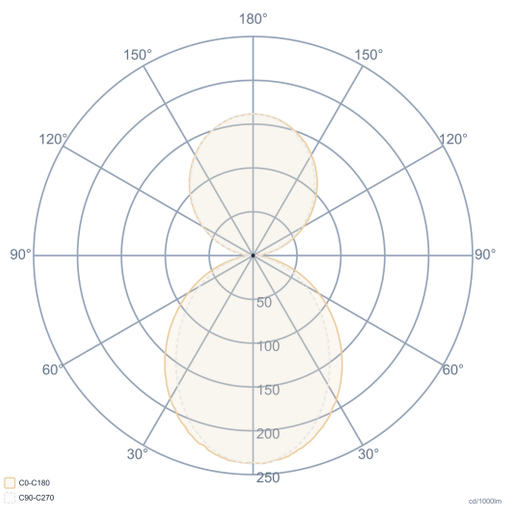

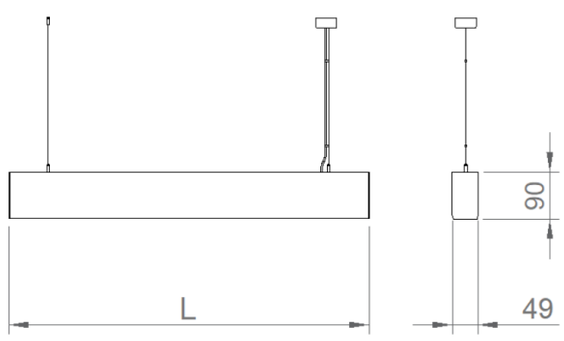
| General Information | |
|---|---|
| **Housing** | Aluminum Extruded |
| **Side Cover** | Aluminum Injection |
| **Optics** | Opal Diffuser |
| **Paint** | Electrostatic Powder Paint |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | 48(W) x 90(H) |
| **Mounting Type** | Pendant |
| **Mounting Part** | Height Adjustable Steel Wire |

| Electrical Info | |
|---|---|
| **Power** | 51W - 78W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 120° (Direct/Indirect) |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | Kg | Direct | Indirect | L (mm) | Control |
|---|---|---|---|---|---|---|---|---|
| 01180.49.30.055 | 51 | 5424 | 3000 | 2,60 | 60% | 40% | 1135 | Tek |
| 01180.49.40.057 | 51 | 5750 | 4000 | 2,60 | 60% | 40% | 1135 | Tek |
| 01180.49.30.070 | 65 | 6926 | 3000 | 3,20 | 60% | 40% | 1415 | Tek |
| 01180.49.40.072 | 65 | 7291 | 4000 | 3,20 | 60% | 40% | 1415 | Tek |
| 01180.49.30.085 | 78 | 8305 | 3000 | 3,90 | 60% | 40% | 1695 | Tek |
| 01180.49.40.087 | 78 | 8742 | 4000 | 3,90 | 60% | 40% | 1695 | Tek |
| 01180.49.30.055 | 51 | 5424 | 3000 | 2,60 | 60% | 40% | 1135 | Çift |
| 01180.49.40.057 | 51 | 5750 | 4000 | 2,60 | 60% | 40% | 1135 | Çift |
| 01180.49.30.070 | 65 | 6926 | 3000 | 3,20 | 60% | 40% | 1415 | Çift |
| 01180.49.40.072 | 65 | 7291 | 4000 | 3,20 | 60% | 40% | 1415 | Çift |
| 01180.49.30.085 | 78 | 8305 | 3000 | 3,90 | 60% | 40% | 1695 | Çift |
| 01180.49.40.087 | 78 | 8742 | 4000 | 3,90 | 60% | 40% | 1695 | Çift |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com