



# Lightline - 049 D/E

## Direkt/Endirekt

Indoor Lighting - Pendant Lighting



Colour Options



Ral 9016



Ral 9006



Ral 9005

### TECHNICAL INFORMATION

<b>Housing</b>	Extruded Aluminum Profile
<b>Side Cover</b>	Aluminum Injection
<b>Diffuser</b>	Opal Diffuser with High Light Transmission
<b>Paint</b>	Electrostatic Powder Paint
<b>Dimensions(mm)</b>	48(W) x 90(H)

### OPTICAL SPECIFICATIONS

<b>Optics</b>	Direct - Indirect
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

### ELECTRICAL



<b>Power (W)</b>	51W-78W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

### OPTIONAL


- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

### ASSEMBLY

<b>Installation Type</b>	Pendant
<b>Mounting Apparatus</b>	Height Adjustable Steel Wire

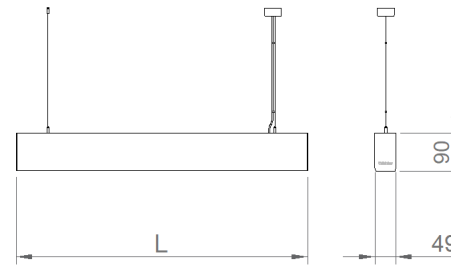

Order Code	W	Lm	CCT	CRI	Direct	Indirect	L (mm)	Burning Pattern	Kg
01180.49.30.055	51	5424	3000	Ra>80	60%	40%	1135	Çift Kontrol	2,6
01180.49.40.057	51	5750	4000	Ra>80	60%	40%	1135	Çift Kontrol	2,6
01180.49.30.070	65	6926	3000	Ra>80	60%	40%	1415	Çift Kontrol	3,2
01180.49.40.072	65	7291	4000	Ra>80	60%	40%	1415	Çift Kontrol	3,2
01180.49.30.085	78	8305	3000	Ra>80	60%	40%	1695	Çift Kontrol	3,9
01180.49.40.087	78	8742	4000	Ra>80	60%	40%	1695	Çift Kontrol	3,9
01180.49.30.055	51	5424	3000	Ra>80	60%	40%	1135	Tek Kontrol	2,6
01180.49.40.057	51	5750	4000	Ra>80	60%	40%	1135	Tek Kontrol	2,6
01180.49.30.070	65	6926	3000	Ra>80	60%	40%	1415	Tek Kontrol	3,2
01180.49.40.072	65	7291	4000	Ra>80	60%	40%	1415	Tek Kontrol	3,2
01180.49.30.085	78	8305	3000	Ra>80	60%	40%	1695	Tek Kontrol	3,9
01180.49.40.087	78	8742	4000	Ra>80	60%	40%	1695	Tek Kontrol	3,9

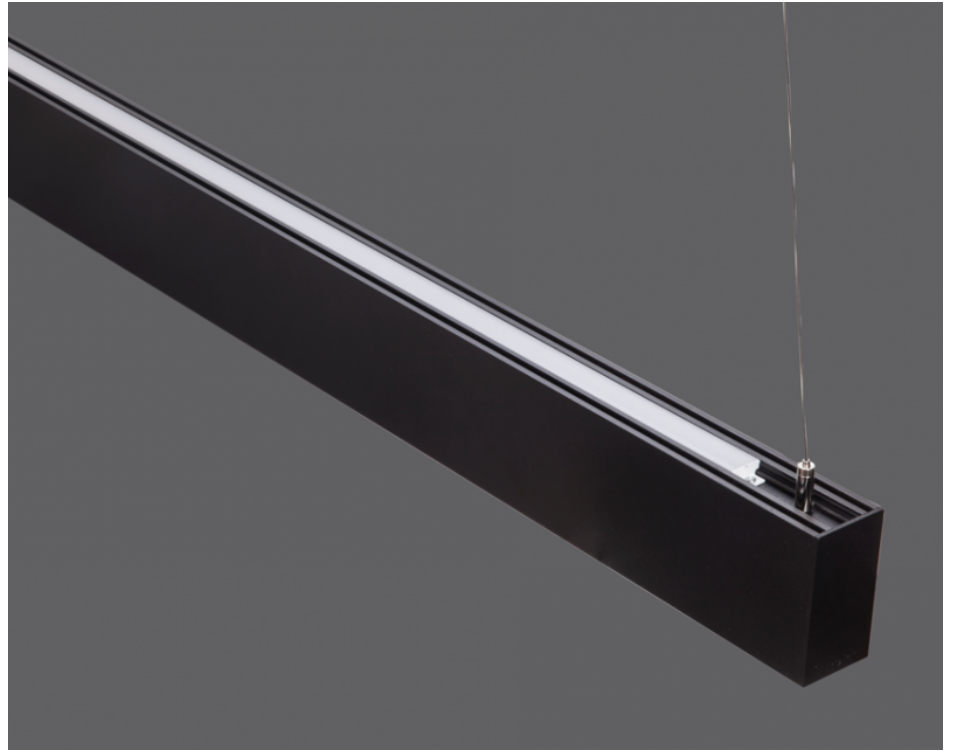

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.  
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.  
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

+90 (216) 397 22 16  
info@ikizleraydinlatma.com

