

LIGHTLINE-058


01180


Pendant Lighting Fixtures

Lightline-058, with its 58 mm profile width, offers a powerful lighting effect, especially in large spaces. Its opal diffuser, providing homogeneous light distribution, offers balanced and comfortable lighting while creating a fuller and more defined line of light in the space.

The aluminum body structure and the side cover design with concealed screw details give the product a simple and integrated look. Its structure, suitable for linear lighting, offers flexible solutions in straight, corner, or custom geometric designs. Different color temperature and control options allow for the creation of project-specific lighting scenarios. With pendant and surface mounting alternatives, it adapts to different application needs in office, commercial, and architectural spaces.

RAL 9016 RAL 9005 RAL 9006

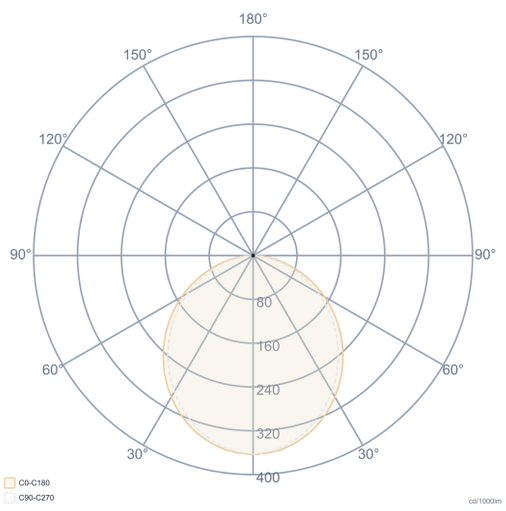

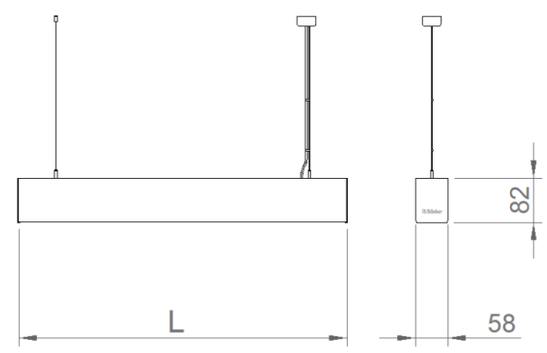

General Information	
Housing	Aluminum Extruded
Side Cover	Aluminum Injection
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	58(W) x 82(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	16-62W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogjen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01180.57.30.015	16	1450	3000	575	1,30
01180.57.40.016	16	1570	4000	575	1,30
01180.57.30.021	21	1680	3000	575	1,30
01180.57.40.022	21	1770	4000	575	1,30
01180.57.30.023	22	1950	3000	855	2,00
01180.57.40.024	22	2075	4000	855	2,00
01180.57.30.032	31	2700	3000	855	2,00
01180.57.40.033	31	2800	4000	855	2,00
01180.57.30.031	29	2400	3000	1135	2,70
01180.57.40.032	29	2500	4000	1135	2,70
01180.57.30.043	42	3250	3000	1135	2,70
01180.57.40.044	42	3400	4000	1135	2,70
01180.57.30.038	36	3200	3000	1415	3,20
01180.57.40.039	36	3350	4000	1415	3,20
01180.57.30.053	52	4550	3000	1415	3,20
01180.57.40.055	52	4700	4000	1415	3,20
01180.57.30.046	43	3900	3000	1695	3,70
01180.57.40.048	43	4100	4000	1695	3,70
01180.57.30.064	62	5640	3000	1695	3,70
01180.57.40.066	62	5900	4000	1695	3,70

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/- 250 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.
Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com