
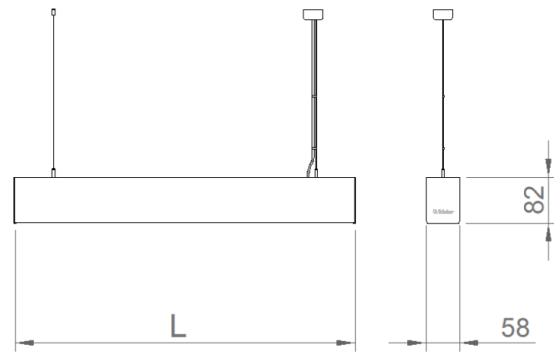


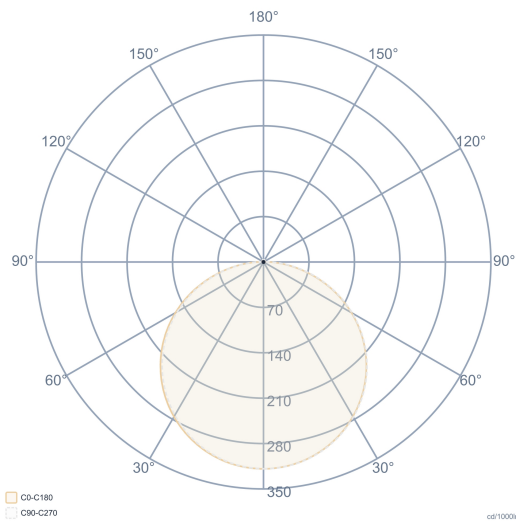

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	15-62W	Light Output Angle	80°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 19
Optics	Microprismatic Lens	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	58(W) x 82(H)	LED Driver	Constant Current		
Mounting Type	Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Wire	LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	L (mm)	Kg
01180.57.30.015	15	1300	3000	575	1,30
01180.57.40.016	15	1360	4000	575	1,30
01180.57.30.021	21	1730	3000	575	1,30
01180.57.40.022	21	1770	4000	575	1,30
01180.57.30.023	22	1850	3000	855	2,00
01180.57.40.024	22	1940	4000	855	2,00
01180.57.30.032	31	3030	3000	855	2,00
01180.57.40.033	31	3410	4000	855	2,00
01180.57.30.031	29	2160	3000	1135	2,70
01180.57.40.032	29	2270	4000	1135	2,70
01180.57.30.043	42	3890	3000	1135	2,70
01180.57.40.044	42	4090	4000	1135	2,70
01180.57.30.038	36	3710	3000	1415	3,20
01180.57.40.039	36	3960	4000	1415	3,20
01180.57.30.053	52	5050	3000	1415	3,20
01180.57.40.055	52	5720	4000	1415	3,20
01180.57.30.046	43	4460	3000	1695	3,70
01180.57.40.048	43	4840	4000	1695	3,70
01180.57.30.064	62	6050	3000	1695	3,70
01180.57.40.066	62	6850	4000	1695	3,70

Verilen tüm teknik ve diğer değerler nominal değerlerdir. Işık akısı ve bağlı elektrik verisi +/- %10 luk bir başlangıç toleransı tabidir. Renk sıcaklığı toleransı: ±100 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İhtiyaçlar ve ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com

