




LIGHTLINE MC-058

01180

Pendant Profile with Micro-Prismatic Lens

The Lightline 58 MC Series, with its 58 mm profile width, provides a powerful lighting effect, especially in large spaces, and enhances architectural emphasis. Thanks to its microprismatic lens structure, it distributes light in a controlled manner, reducing glare, and provides high visual comfort in workspaces with a $UGR \leq 19$ value.

The aluminum body structure and the side cover design with concealed screw details give the product a simple and integrated look. Its suitability for continuous line applications offers flexible solutions in straight, corner, or custom geometric designs. Different color temperature and control options allow for the creation of project-specific lighting scenarios.

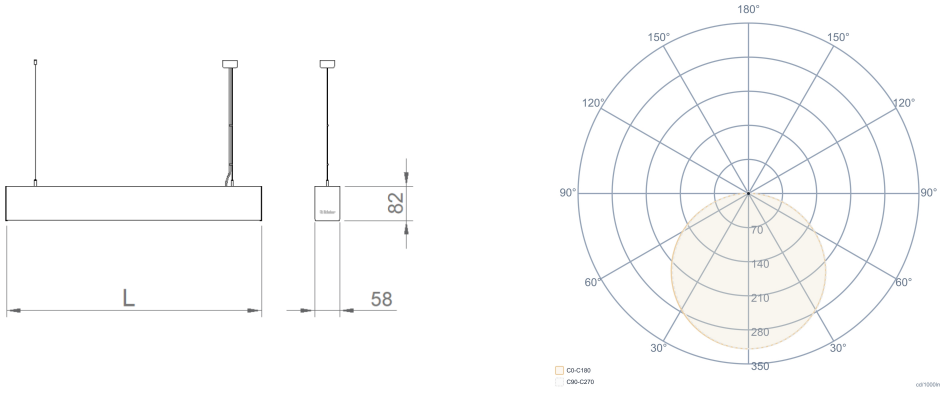

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	15-62W	Light Output Angle	80°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 19
Optics	Microprismatic Lens	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	58(W) x 82(H)	LED Driver	Constant Current		
		Ambient Temperature	-20°C / +50°C		
Mounting Type	Pendant	LED Lifetime L70	>50.000 Hour		
Mounting Part	Height Adjustable Steel Wire			DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	L (mm)	Kg
01180.57.30.032	31	3030	3000	855	2,00

