



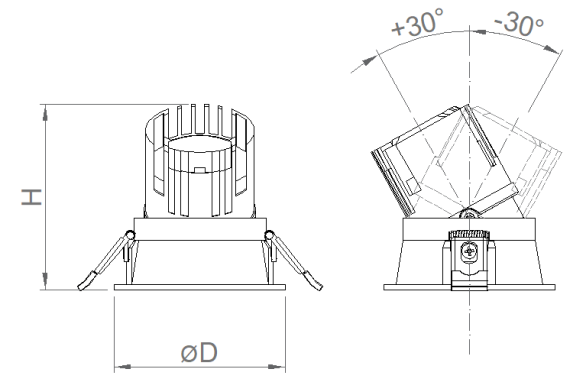

RAL 9016

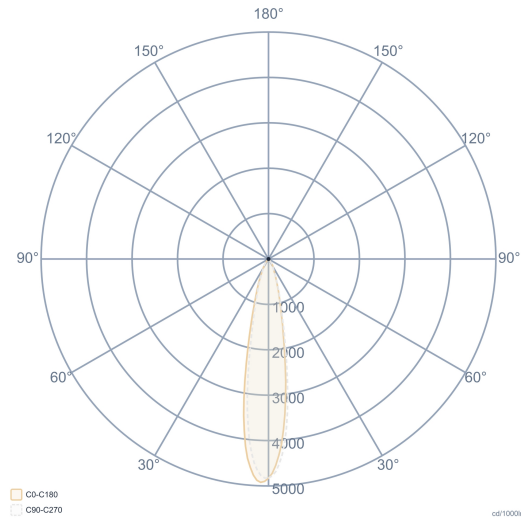

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	8W-11W	Light Output Angle	15°-24°-38°
Optics	Lens + Reflector	Light Source	COB LED	UGR Value	UGR≤14
Accessories	Honeycomb	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
Adjustable Body	+30°/ -30°	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Coating	LED Driver	Constant Current	Optional	
Insulation Class	Class II	Ambient Temperature	-20°C / +50°C		
Product Dimensions [mm]	Ø64-Ø85	LED Lifetime L70	>50.000 Hour		
Mounting Type	Recessed				
Mounting Part	Steel Spring			DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05381.64.30.007	8	550	15°/24°/38°	3000	Ø64x72	Ø55	0,20
05381.64.40.007	8	580	15°/24°/38°	4000	Ø64x72	Ø55	0,20
05381.80.30.008	11	1060	15°/24°/38°	3000	Ø85x88	Ø75	0,40
05381.80.40.008	11	1140	15°/24°/38°	4000	Ø85x88	Ø75	0,40

