



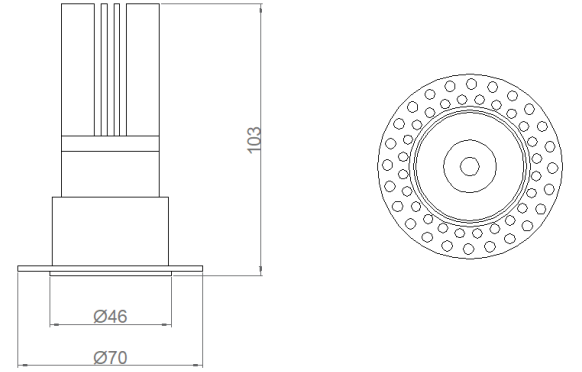

RAL 9016

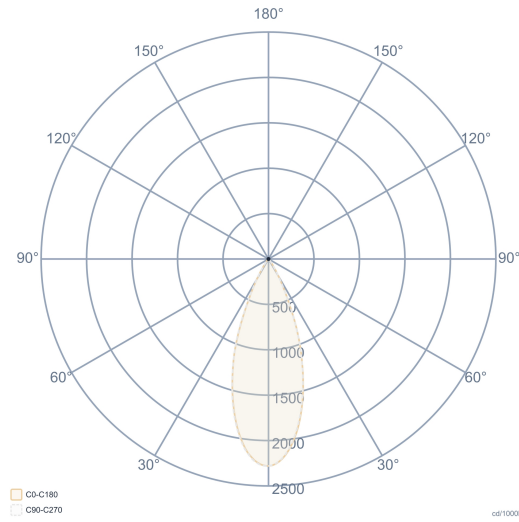

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Injection	Power	10W	Light Output Angle	36°
Frame	Aluminum Injection-Trimless	Light Source	COB LED	UGR Value	UGR ≤ 19
Optics	Polished Reflector + Lens	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class II	LED Driver	Constant Current	Optional	
Product Dimensions [mm]	Ø46x105((H)	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Saat		
Mounting Type	Trimless and Recessed			2700K ~ 6500K	
Mounting Part	Trimless Frame			Lens Angle - 24°/ 28°	
				Plug-in Energy Input Connector	

Order Code	W	Lm	Angle	CCT	ØDx(H)	Cut-out dimensions (mm)	Kg
05212.04.30.007	10	740	36°	3000	Ø46x105mm	Ø45mm	0,185
05212.04.40.007	10	840	36°	4000	Ø46x105mm	Ø45mm	0,185

