



RAL 9005



PANORAMIC-M

09336

Modern and minimalist architectural design

Panoramic-M is a decorative outdoor bollard luminaire with a minimalist design and optical performance; it offers safe and comfortable lighting for walkways, parks, landscaped areas, residential perimeters, and commercial outdoor applications.

Thanks to its high UV-resistant PMMA lens structure, it directs light in a controlled manner, while adapting to different application needs with symmetrical and asymmetrical optical options. With -50° Wide Beam and -20°/+115° Oval Beam light distributions, it provides homogeneous lighting on pedestrian walkways, minimizing glare. With a UGR<16 value, it enhances visual comfort, while MacAdam ≤ 3 color consistency ensures homogeneous light quality throughout the project.

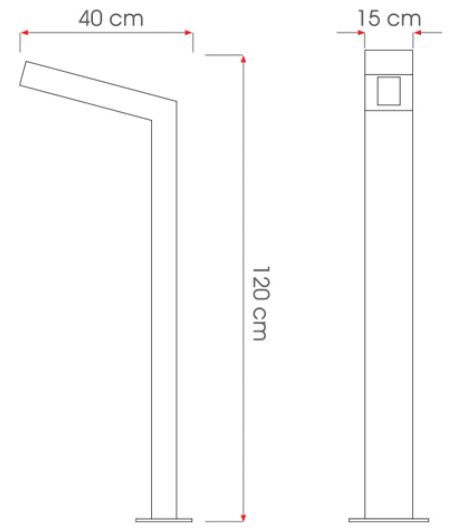

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum	Power	14-26W	Optics	~50° / ~20°+115°
Optics	PMMA Lens	Power Factor	>0.95	UGR Value	UGR $\leq$ 16
Paint	Electrostatic Powder Paint	Light Source	High Power LED	CRI [Ra]	CRI $\geq$ 80
Insulation Class	Class I	Cabling	Halojen-Free	Color Bin Value	Mc Adams $\leq$ 3
Product Dimensions [mm]	400x1200(H)mm	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Mounting Type	Surface	LED Driver	Constant Current		
		Ambient Temperature	-30°C / +60°C		
		LED Lifetime L70	>50.000 Saat	DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	

Order Code	W	Lm	CCT	WxH (mm)
09336.41.30.016	14	1680	3000	400x1200
09336.41.40.016	14	1800	4000	400x1200
09336.41.30.031	26	3120	3000	400x1200
09336.41.40.031	26	3400	4000	400x1200

