




VEGA 09346



RAL 9005

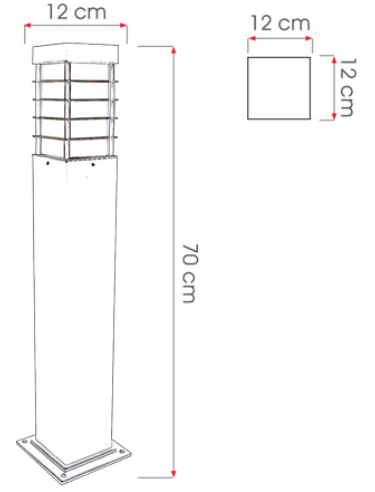

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum	Power	10-20W	UGR Value	UGR≤16
Optics	PMMA Lens	Power Factor	>0.95	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Light Source	High Power LED	Color Bin Value	Mc Adams ≤ 3
LED/Beam Angle	~50° wide beam /~20°+115° Oval beam	Cabling	Halojen-Free	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Diffuser	Opaque Polycarbonate	Input Voltage	220-240V AC / 50-60 Hz		
Insulation Class	Class I	LED Driver	Constant Current		
Product Dimensions [mm]	120(W)x120(L)x700(H)	Ambient Temperature	-30°C / +60°C		
Mounting Type	Surface	LED Lifetime L70	>50.000 Saat		

Order Code	W	Lm	CCT	WxLxH (mm)
09346.17.30.012	10	1200	3000	120x120x700
09346.17.40.012	10	1300	4000	120x120x700
09346.17.30.024	20	2400	3000	120x120x700
09346.17.40.024	20	2500	4000	120x120x700

