

Vega

Outdoor Lighting - Urban Lighting



Colour Options



Ral 9005

TECHNICAL INFORMATION

Housing	Corrosion Resistant Aluminum
Inner Diffuser	High UV Resistant PMMA Lens
Paint	Electrostatic Powder Paint
LED/Beam Angle	~50° wide beam / ~20°+115° Oval beam
Diffuser	Opaque Polycarbonate

OPTICAL SPECIFICATIONS

Optics	Symmetrical / Asymmetrical
UGR Value	UGR≤16
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3


ELECTRICAL

Power (W)	10-20W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-30°C / +60°C
LED Lifetime L80B50	>50.000 Saat

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

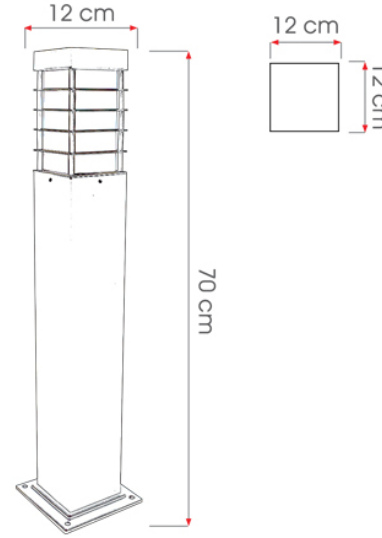

Order Code	W	Lm	CCT	WxLxH (mm)
09346.17.30.012	10	1200	3000	120x120x700
09346.17.40.012	10	1300	4000	120x120x700
09346.17.30.024	20	2400	3000	120x120x700
09346.17.40.024	20	2500	4000	120x120x700

