

Strix

Outdoor Lighting - Urban Lighting



Colour Options



Ral 9005

TECHNICAL INFORMATION

Housing	Corrosion Resistant Aluminum
Inner Diffuser	Yüksek UV Dayanımlı PMMA Lens
Glass	Tempered Clear Glass
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Simetrik / Asimetrik
UGR Value	UGR≤16
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3


ELECTRICAL

Power (W)	14-24W
Power Factor	>0.95
Light Source	High Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-30°C / +60°C
LED Lifetime L80B50	>50.000 Saat
Cabling	Halojen-Free

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

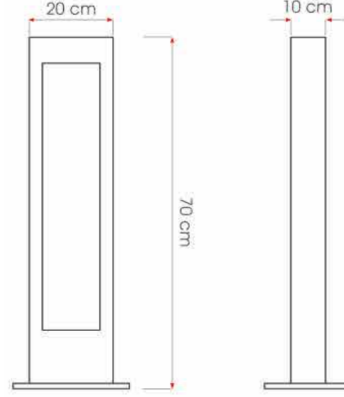

Order Code	W	Lm	CCT	WxHxL (mm)
09356.27.30.016	14	1600	30000	200x100x700
09356.27.40.016	14	1700	4000	200x100x700
09356.27.30.042	24	4200	3000	200x100x700
09356.27.40.042	24	4400	4000	200x100x700

