

Axis

Outdoor Lighting - Urban Lighting



Colour Options



Ral 9005

TECHNICAL INFORMATION

Housing Corrosion Resistant Aluminum
Diffuser High UV Resistant PMMA Lens
LED/Beam Angle ~50° Wide beam / ~20°+115° Oval beam

OPTICAL SPECIFICATIONS

Optics Symmetrical / Asymmetrical
UGR Value UGR≤16
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3


ELECTRICAL

Power (W) 10-30W
Power Factor >0.95
Light Source High Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -30°C / +60°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

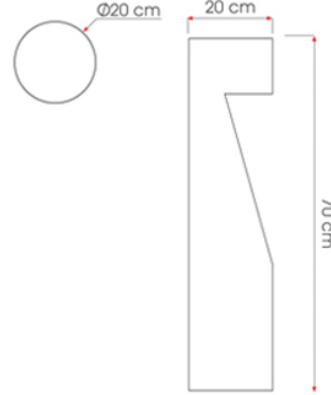

Order Code	W	Lm	CCT	ØxH (mm)
09366.27.30.012	10	1200	3000	Ø200x700
09366.27.40.012	10	1300	4000	Ø200x700
09366.27.30.024	20	2400	3000	Ø200x700
09366.27.40.024	20	2600	4000	Ø200x700
09366.27.30.036	30	3600	3000	Ø200x700
09366.27.40.036	30	3800	4000	Ø200x700

