




AXIS 09366



RAL 9005

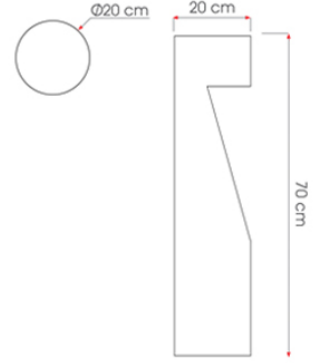

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum	Power	10-30W	UGR Value	UGR≤16
Optics	PMMA Lens	Power Factor	>0.95	CRI [Ra]	CRI ≥ 80
LED/Beam Angle	~50° Wide beam /~20°+115° Oval beam	Light Source	High Power LED	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Cabling	Halojen-Free	Optional	
Product Dimensions [mm]	Ø200x700(H)	Input Voltage	220-240V AC / 50-60 Hz		
Mounting Type	Surface	LED Driver	Constant Current		
Mounting Part		Ambient Temperature	-30°C / +60°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD x H (mm)
09366.27.30.012	10	1200	3000	Ø200x700
09366.27.40.012	10	1300	4000	Ø200x700
09366.27.30.024	20	2400	3000	Ø200x700
09366.27.40.024	20	2600	4000	Ø200x700
09366.27.30.036	30	3600	3000	Ø200x700
09366.27.40.036	30	3800	4000	Ø200x700

