


RAL 9005

AXIS

09366

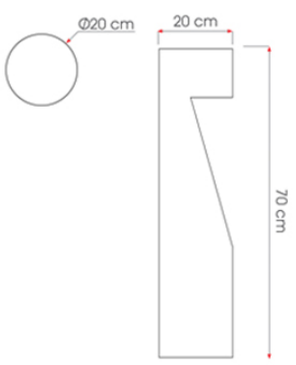

General Information	
Housing	Corrosion Resistant Aluminum
Optics	PMMA Lens
LED/Beam Angle	~50° Wide beam /~20°+115° Oval beam
Insulation Class	Class I
Product Dimensions [mm]	Ø200x700(H)
Mounting Type	Surface
Mounting Part	

Electrical Info	
Power	10-30W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
UGR Value	UGR≤16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional

Order Code	W	Lm	CCT	ØD x H (mm)
09366.27.30.012	10	1200	3000	Ø200x700
09366.27.40.012	10	1300	4000	Ø200x700
09366.27.30.024	20	2400	3000	Ø200x700
09366.27.40.024	20	2600	4000	Ø200x700
09366.27.30.036	30	3600	3000	Ø200x700
09366.27.40.036	30	3800	4000	Ø200x700

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com