

Lilyum-YT 100

Indoor Lighting - Spot Lighting, Trimless
Spot Lighting



Colour Options



Ral 9016

TECHNICAL INFORMATION

Housing	Adjustable Aluminum Injection
Frame	Aluminum Injection-Trimless
Reflector	Metallized Surface Optics
Diffuser	Clear Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	36°
UGR Value	UGR ≤ 10
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	11W
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

2700K ~ 6500K
DALI
Plug-in Energy Input Connector

ASSEMBLY

Installation Type	Under Plaster
Mounting	Trimless Frame
Apparatus	

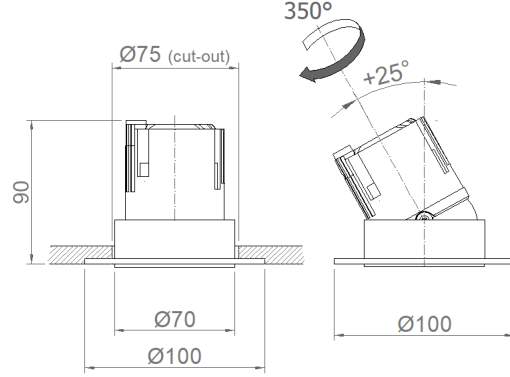

Order Code	W	Lm	Angle	CCT	ØxH (mm)	Ceiling Cutting (mm)	Kg
05387.10.30.010	11	950	36°	3000	Ø100x90	Ø75	0,4
05387.10.40.010	11	1050	36°	4000	Ø100x90	Ø75	0,4

