



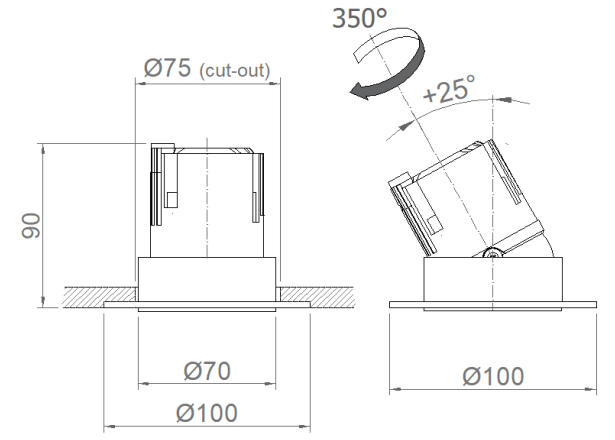

RAL 9016

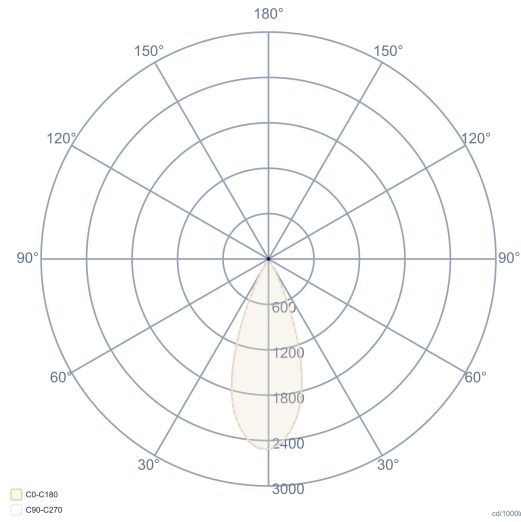

General Information		Electrical Info		Lighting Technology	
Housing	Adjustable Aluminum Injection	Power	11W	Light Output Angle	36°
Frame	Aluminum Injection-Trimless	Light Source	COB LED	UGR Value	UGR ≤ 10
Optics	Polished Reflector + Lens	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class II	LED Driver	Constant Current	Optional	
Product Dimensions [mm]	Ø100x90(H)	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
Mounting Type	Trimless and Recessed			DALI / 1-10V	
Mounting Part	Trimless Frame			2700K ~ 6500K	
				Plug-in Energy Input Connector	

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05387.10.30.010	11	950	36°	3000	Ø100x90	Ø75	0,40
05387.10.40.010	11	1050	36°	4000	Ø100x90	Ø75	0,40

