




RAL 9016

VIYOLA

09593

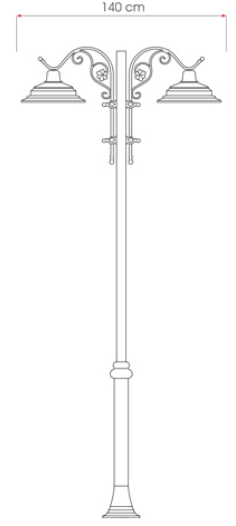

General Information		Electrical Info		Lighting Technology	
Housing	Corrosion Resistant Aluminum Injection Body	Power	2x41-2x112W	Light Output Angle	60° / 150°
Pole	Corrosion Resistant Galvanized Steel Body	Power Factor	>0.95	UGR Value	UGR ≤ 25
Optics	PMMA Lens + Glass	Light Source	High Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White	
Product Dimensions [mm]	1400(W)x3000/4000(L)	LED Driver	Constant Current		
Mounting Type	Surface	Ambient Temperature	-30°C / +60°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxL (mm)
09593.13.30.106	2x41	10130	3000	1400x3000
09593.13.40.106	2x41	10660	4000	1400x3000
09593.13.30.148	2x57	14080	3000	1400x4000
09593.13.40.148	2x57	14820	4000	1400x4000
09593.13.30.221	2x85	21000	3000	1400x4500
09593.13.40.221	2x85	22100	4000	1400x4500
09593.13.30.291	2x112	28500	3000	1400x6000
09593.13.40.291	2x112	29200	4000	1400x6000

