

Viyola

Outdoor Lighting - Urban Lighting



Colour Options



Ral 7016

TECHNICAL INFORMATION

Housing	Corrosion Resistant Aluminum Injection Body
Pole	Corrosion Resistant Galvanized Steel Body
Optics	PMMA Lens + Glass
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical 60° / Asymmetrical 150°
Light Output Angle	Symmetrical 60° / Asymmetrical 150°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3


ELECTRICAL

Power (W)	2x41-2x112W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-30°C / +60°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

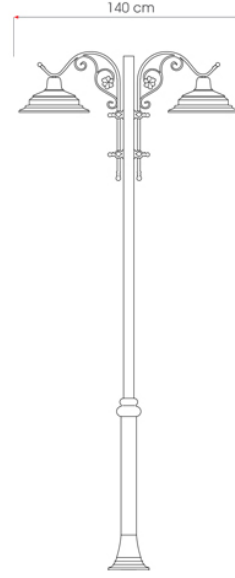

Order Code	W	Lm	CCT	WxL (mm)	Productivity
09593.13.30.106	2x41	10130	3000	1400x3000	130 Lm/W
09593.13.40.106	2x41	10660	4000	1400x3000	130 Lm/W
09593.13.30.148	2x57	14080	3000	1400x4000	130 Lm/W
09593.13.40.148	2x57	14820	4000	1400x4000	130 Lm/W
09593.13.30.221	2x85	21000	3000	1400x4500	130 Lm/W
09593.13.40.221	2x85	22100	4000	1400x4500	130 Lm/W
09593.13.30.291	2x112	28500	3000	1400x6000	130 Lm/W
09593.13.40.291	2x112	29200	4000	1400x6000	130 Lm/W

