


Vektor

Outdoor Lighting - Urban Lighting, Urban Lighting



Colour Options

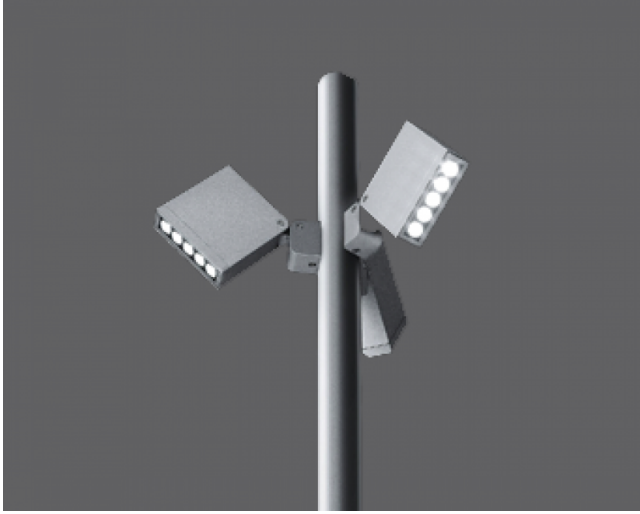

TECHNICAL INFORMATION

Housing	Corrosion Resistant Aluminum Injection Body
Pole	Corrosion Resistant Galvanized Steel Body
Optics	PMMA Lens + Glass
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical 60° / Asymmetrical 150°
Light Output Angle	Symmetrical 60° / Asymmetrical 150°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	3x15-3x30W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-30°C / +60°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted



Order Code	W	Lm	CCT	WxH (mm)	Productivity
09594.63.30.058	3x15	5600	3000	600x3000	130 Lm/W
09594.63.40.058	3x15	5850	4000	600x3000	130 Lm/W
09594.63.30.117	3x30	11200	3000	600x4000	130 Lm/W
09594.63.40.117	3x30	11700	4000	600x4000	130 Lm/W

