


Alfot-K

Outdoor Lighting - Urban Lighting



Colour Options

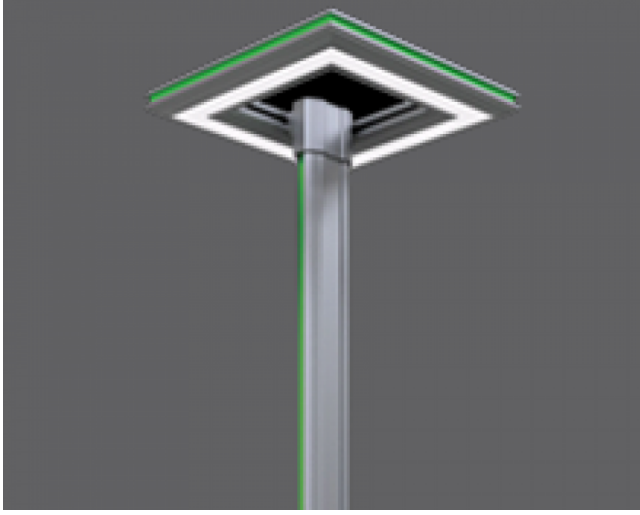

Ral 7016

TECHNICAL INFORMATION

Housing Corrosion Resistant Aluminum Extrusion Body
Pole Corrosion Resistant Galvanized Steel Body
Optics PMMA Lens + Glass

OPTICAL SPECIFICATIONS

Optics Symmetrical 60° / Asymmetrical 150°
Light Output Angle Symmetrical 60° / Asymmetrical 150°
UGR Value UGR ≤ 25
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3


ELECTRICAL

Power (W) 40-120W
Power Factor >0.95
Light Source High Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -30°C / +60°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

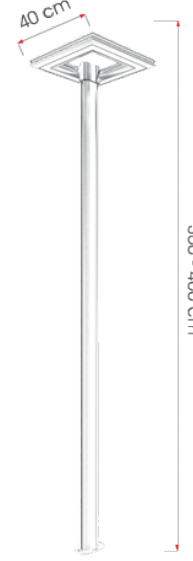

Order Code	W	Lm	CCT	WxH (mm)	Productivity
09595.44.30.052	40	5100	3000	400x4000	130 Lm/W
09595.44.40.052	40	5200	4000	400x4000	130 Lm/W
09595.44.30.078	60	7600	3000	400x4000	130 Lm/W
09595.44.40.078	60	7800	4000	400x4000	130 Lm/W
09595.44.30.117	90	11500	3000	400x4000	130 Lm/W
09595.44.40.117	90	11700	4000	400x4000	130 Lm/W
09595.44.30.156	120	15500	3000	400x4000	130 Lm/W
09595.44.40.156	120	15600	4000	400x4000	130 Lm/W

