

Xpoint

Outdoor Lighting - Street Lighting, Urban Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Corrosion Resistant Aluminum Injection Body
Pole	Corrosion Resistant Galvanized Steel Body
Optics	PMMA Lens + Glass
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical 60° / Asymmetrical 150°
Light Output Angle	Symmetrical 60° / Asymmetrical 150°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3


ELECTRICAL

Power (W)	28-116W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-30°C / +60°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

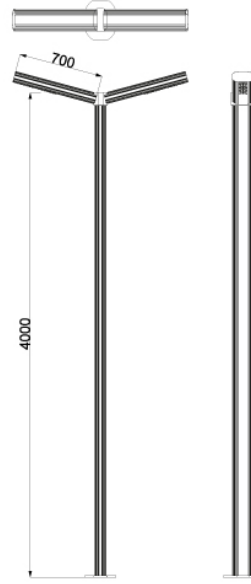

Order Code	W	Lm	CCT	WxH (mm)	Productivity
09591.73.30.036	28	3600	3000	700x3200	130 Lm/W
09591.73.40.036	28	3640	4000	700x3200	130 Lm/W
09591.73.30.075	58	7500	3000	700x4200	130 Lm/W
09591.73.40.075	58	7540	4000	700x4200	130 Lm/W
09591.73.30.110	85	11000	3000	700x5200	130 Lm/W
09591.73.40.110	85	11500	4000	700x5200	130 Lm/W
09591.73.30.150	116	15000	3000	700x6200	130 Lm/W
09591.73.40.150	116	15080	4000	700x6200	130 Lm/W
09591.13.30.072	2x28	2x3600	3000	1450x3200	130 Lm/W
09591.13.40.072	2x28	2x3640	4000	1450x3200	130 Lm/W
09591.13.30.150	2x58	2x7500	3000	1450x4200	130 Lm/W
09591.13.40.150	2x58	2x7540	4000	1450x4200	130 Lm/W
09591.13.30.221	2x85	2x11000	3000	1450x5200	130 Lm/W
09591.13.40.221	2x85	2x11500	4000	1450x5200	130 Lm/W
09591.13.30.301	2x116	2x15000	3000	1450x6200	130 Lm/W
09591.13.40.301	2x116	2x15080	4000	1450x6200	130 Lm/W

