



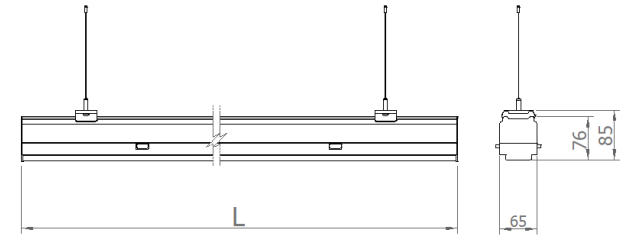

RAL 9016 RAL 9005

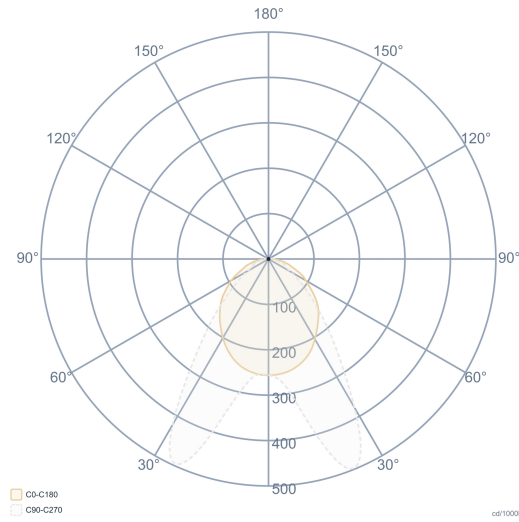

General Information		Electrical Info		Lighting Technology	
Housing	Electrostatic Powder Coated Aluminum	Power	50-76W	Light Output Angle	90° / 60°x90° / 25° / 2x25°
Optics	Optical Lens	Power Factor	>0.95	UGR Value	UGR ≤ 22
Side Cover	PC Injection	Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	65(W)x32(H)	LED Driver	Constant Current	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Kit (1h/3h)	
		Ambient Temperature	-20 °C/+40 °C		
		LED Lifetime L70	>100.000 Hours		

Order Code	W	Lm	CCT	Angle	L (mm)	Kg
------------	---	----	-----	-------	--------	----