Linear-Lighting Units

Trunking Lighting Systems - Lighting Units

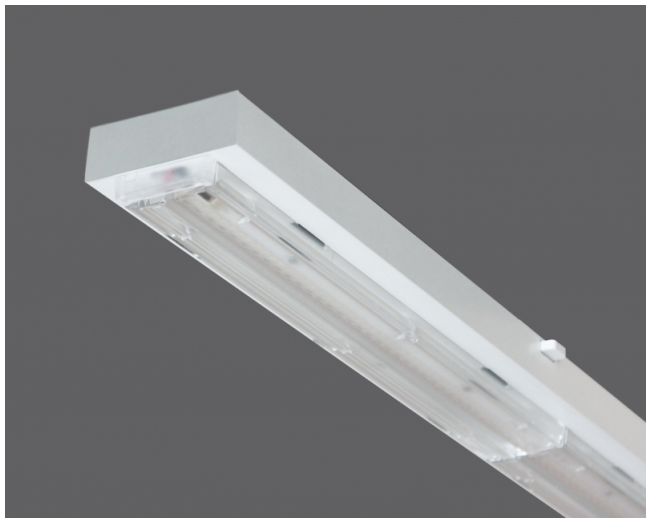

Colour Options

Ral 9016 | Ral 9005

TECHNICAL INFORMATION

Housing	Electrostatic Powder Coated Aluminum Profile
Optics	High Light Transmittance Optical Lens
Dimensions(mm)	65x32MM

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical / Asymmetrical
Light Output Angle	60°Sym / 90°Sym / 40°x100°Sym / 2x25°Asym
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	48-72W
Power Factor	>0.95
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20 °C/+40 °C
LED Lifetime L90B10	>100.000 Hours

OPTIONAL

DALI *
1-10V DIM *
DC Operation Mode
Emergency Kit (1h/3h)
2700K ~ 6500K

ASSEMBLY

Mounting Apparatus	Steel Spring

GLOW WIRE 650°C | IP 40 | IK 08 | RoHS COMPLIANT

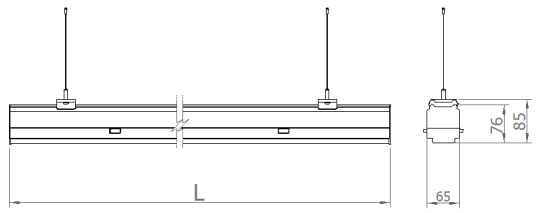

Order Code	W	Lm	CCT	Angle	Productivity	L (mm)	Kg

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com