Highline-F

Indoor Lighting - Industrial Lighting

Colour Options

Ral 7016

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	PC Injection + Silicone Gasket
Diffuser	UV Stabilized Lens + Heat Resistant Tempered Clear Glass
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetric-Asymmetric
Light Output Angle	30°,60°,90°,20x100°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	134-233W
Power Factor	>0.95
Light Source	Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Saat

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)
- SPD
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor
- Wire Cage
- Safety Filmed Glass

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Metal Bracket

GLOW WIRE 650°C

IP 65

IK 08

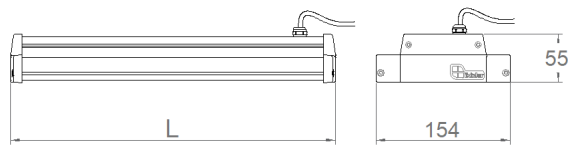



20°x100° Beam Angle

Order Code	W	Lm	CCT	Angle	Productivity	L (mm)	Kg

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com