



RAL 9006



ALTURA IP65

07107

CO-EX Slim Waterproof

The Altura IP65 combines protection with aesthetic appeal thanks to its slim design. The CO-EX extruded PC housing is durable and corrosion-resistant. Its small size makes it ideal for confined spaces and compact applications. The product features an aluminum inner profile where the LED module and driver are mounted. This structure provides heat management, extending the LED's lifespan. Maintenance and servicing are quick and easy thanks to the screw-on side cover system.

It is a reliable and long-lasting lighting solution for corridors, technical areas, parking lots, warehouses, production areas, and humid environments. Thanks to its IP65 protection level, it offers high resistance to dust and moisture.

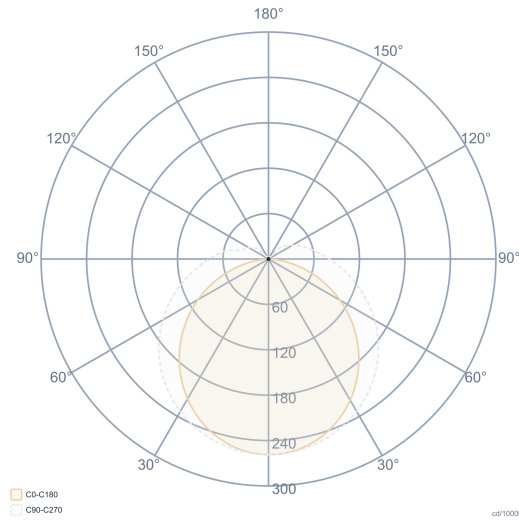

General Information		Electrical Info		Lighting Technology	
Housing	CO-EX Extrusion PC	Power	12-44W	Light Output Angle	120°
Side Cover	PC Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Inner plate	Aluminum Extrusion Profile (LED Mounting)	Light Source	Mid Power LED	CRI [Ra]	CRI ≥ 80
Gasket	Transparent Silicone (inside of the side cover)	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
		Input Voltage	220-240V AC / 50-60 Hz	Optional	
Insulation Class	Class I	LED Driver	Constant Current		
Product Dimensions [mm]	39(W) x 57(H)	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour	DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
07107.06.30.012	12	1320	3000	33x50x580	0,40
07107.06.40.013	12	1380	4000	33x50x580	0,40
07107.12.30.036	35	3850	3000	33x50x1140	0,70
07107.12.40.040	35	4025	4000	33x50x1140	0,70
07107.14.30.046	44	4840	3000	33x50x1420	1,00
07107.14.40.050	44	5060	4000	33x50x1420	1,00

