

Voltar

Indoor Lighting - Industrial Lighting



Colour Options



Rat 9005

TECHNICAL INFORMATION

Housing	Aluminum Injection
Optics	Adjustable Angle Clear Optic Lens
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	60°, 90°, 110°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL




Power (W)	100-200W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Emergency Lighting Unit	- CRI > 90
- 2700K ~ 6500K	- Different color options
- Plug-in Connector	- Class-I Protection Class
- PIR Sensor	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted, Pendant

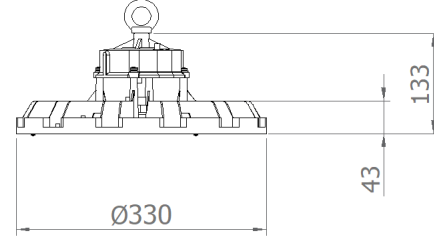

Order Code	W	Lm	CCT	Productivity	Angle	(Ø) (mm)	Kg
07307.33.40.168/60	100	16000	4000	160lm/w	60°	Ø330	2,6
07307.33.40.170/90	100	16150	4000	161lm/w	90°	Ø330	2,6
07307.33.40.167/110	100	15840	4000	158lm/w	110°	Ø330	2,6
07307.33.40.244/60	150	23100	4000	154lm/w	60°	Ø330	2,6
07307.33.40.248/90	150	23350	4000	156lm/w	90°	Ø330	2,6
07307.33.40.243/110	150	22750	4000	152lm/w	110°	Ø330	2,6
07307.33.40.316/60	200	29460	4000	147lm/w	60°	Ø330	2,6
07307.33.40.320/90	200	29600	4000	148lm/w	90°	Ø330	2,6
07307.33.40.315/110	200	28960	4000	145lm/w	110°	Ø330	2,6

