# Voltar

Indoor Lighting - Industrial Lighting

**Colour Options**

Ral 9005

## TECHNICAL INFORMATION

| | |
|---|---|
| **Housing** | Aluminum Injection |
| **Optics** | Adjustable Angle Clear Optic Lens |
| **Paint** | Electrostatic Powder Paint |

## OPTICAL SPECIFICATIONS

| | |
|---|---|
| **Optics** | Symmetrical |
| **Light Output Angle** | 60°,90°,110° |
| **UGR Value** | UGR ≤ 22 |
| **CRI** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

## ELECTRICAL

| | |
|---|---|
| **Power (W)** | 100-200W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halojen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | High Efficiency Constant Current Output |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L80B50** | >50.000 Hour |

## OPTIONAL

- DALI
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor
- 1-10V DIM
- CRI > 90
- Different color options
- Class-I Protection Class
- AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Surface Mounted, Pendant

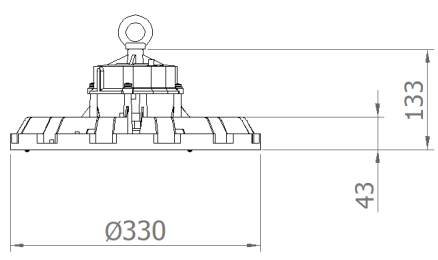




| Order Code | W | Lm | CCT | Productivity | Angle | ( Ø ) (mm) | Kg |
|---|---|---|---|---|---|---|---|

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com