

Even-GN IP65

Indoor Lighting - Sterile Environment Lighting



TECHNICAL INFORMATION

Housing	Metal Sheet
Diffuser	Opal Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL




Power (W)	28-39W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +40°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- 2700K ~ 6500K	- Different RAL Color Options
- Plug-in Energy Input Connector	- Class-II Protection Class
- PIR Sensor	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Under Plaster

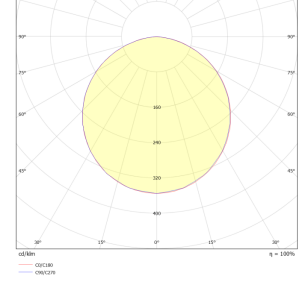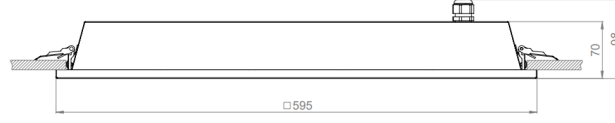

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Cut-out dimensions (mm)	Kg
02144.66.30.033	28	3300	3000	Ra>80	595x595x70	580x580	4,5
02144.66.40.034	28	3400	4000	Ra>80	595x595x70	580x580	4,5
02144.66.30.038	33	3850	3000	Ra>80	595x595x70	580x580	4,5
02144.66.40.040	33	4000	4000	Ra>80	595x595x70	580x580	4,5
02144.66.30.043	39	4350	3000	Ra>80	595x595x70	580x580	4,5
02144.66.40.045	39	4500	4000	Ra>80	595x595x70	580x580	4,5

