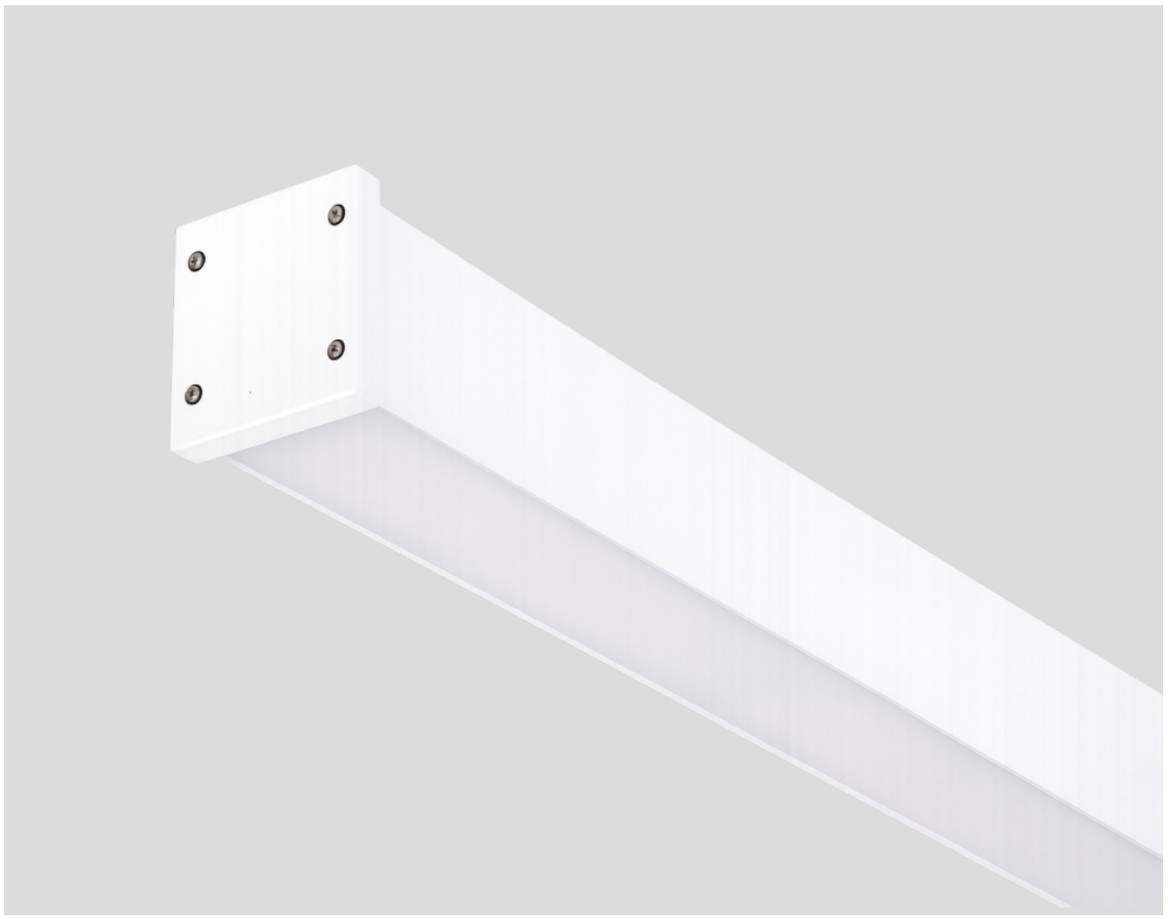


WATERLINE 080-IP65

01194


IP65 Industrial Lighting Luminaire

Waterline 080 Series is a durable lighting solution developed for demanding environments, featuring IP65 and IK10. Its aluminum body and cover construction provide high mechanical strength and long-lasting performance. The specially designed diffuser with an integrated silicone gasket ensures reliable protection against dust and moisture, enabling the luminaire to achieve its IP65 protection rating. At the same time, it delivers uniform and comfortable illumination, enhancing visual comfort.

Metro stations, high-speed rail platforms, tunnels, pedestrian underpasses, parking facilities and industrial environments. With different lengths, color temperature options and control alternatives, it can be adapted to project-specific requirements.



RAL 9016 RAL 9005 RAL 9006

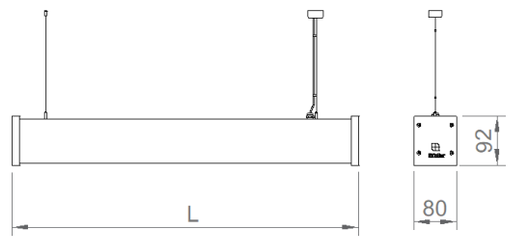

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	**Power**	18W-65W	**Light Output Angle**	110°
Side Cover	Aluminum Injection	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Diffuser	Silicone Sealed Extruded PC	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Paint	Electrostatic Powder Paint	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	80(W) x 92(H)	**LED Driver**	Constant Current		
Mounting Type	Surface and Pendant	**Ambient Temperature**	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Spring + Wire	**LED Lifetime L70**	>102.000 Saat		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
01194.89.30.019	18	1900	3000	80x92x595	1,70
01194.89.40.020	18	2000	4000	80x92x595	1,70
01194.89.30.029	27	2900	3000	80x92x875	2,30
01194.89.40.030	27	3000	4000	80x92x875	2,30
01194.89.30.039	38	3900	3000	80x92x1155	2,90
01194.89.40.041	38	4100	4000	80x92x1155	2,90
01194.89.30.049	46	5000	3000	80x92x1435	3,50
01194.89.40.052	46	5200	4000	80x92x1435	3,50
01194.89.30.059	56	6000	3000	80x92x1715	4,10
01194.89.40.062	56	6200	4000	80x92x1715	4,10
01194.89.30.069	65	7000	3000	80x92x1995	4,80
01194.89.40.072	65	7200	4000	80x92x1995	4,80

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com