


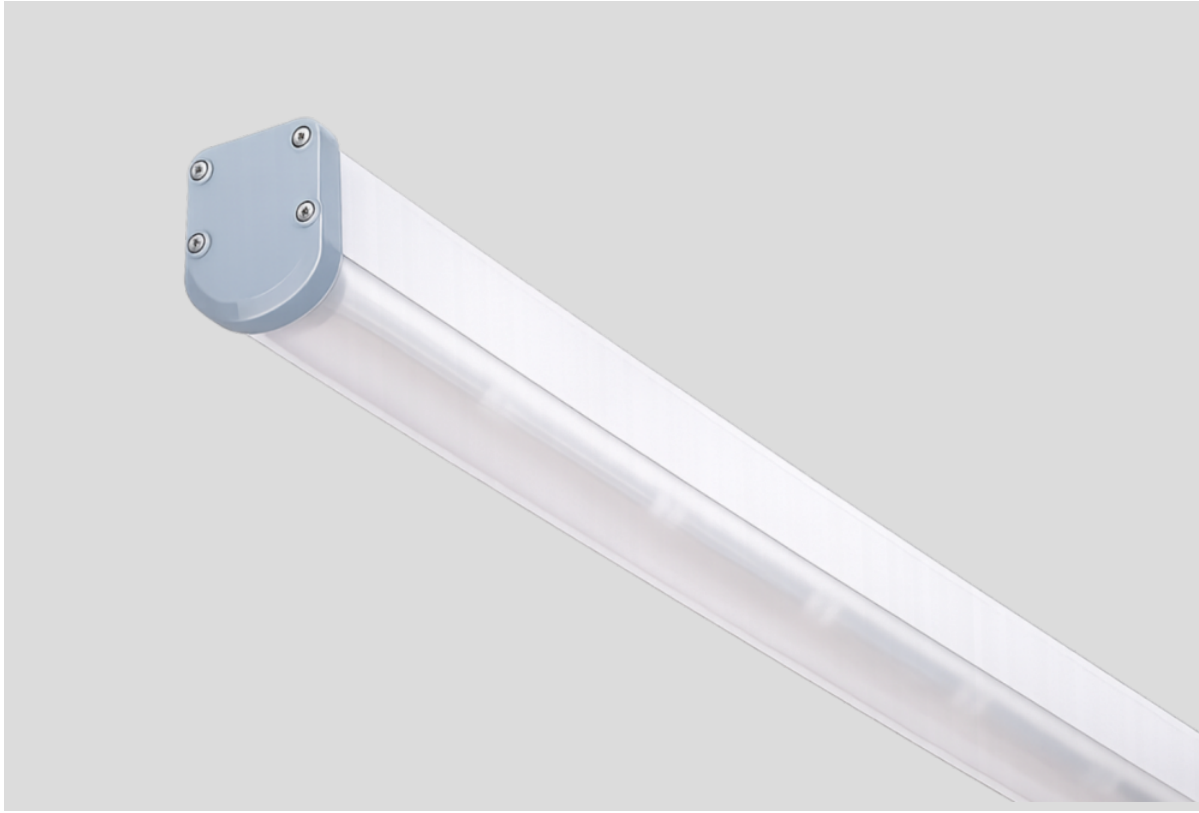

RAL 9006

DRAX Batwing


07110

Lightweight and Durable Waterproof Lighting

Draw IP65 combines aesthetic appeal with a high level of protection thanks to its slim and compact design. Its CO-EX extruded PC housing offers a lightweight, durable, and corrosion-resistant structure.

The product features an aluminum inner profile where the LED modules and driver are mounted. This structure provides heat management, increasing LED lifespan and supporting mechanical strength. Maintenance and servicing are easily performed thanks to the screw-on side cover system.

It is reliable and long-lasting for corridors, technical areas, parking lots, production areas, warehouses, and humid environments. Its IP65 protection level provides high resistance to dust and moisture.

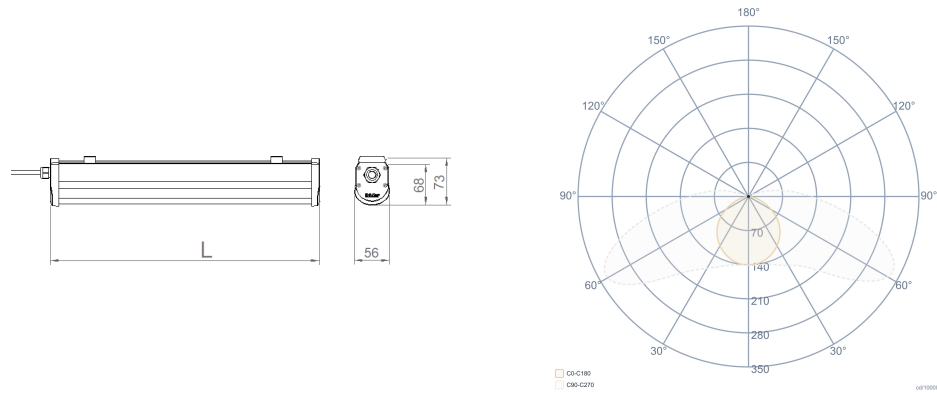

General Information		Electrical Info		Lighting Technology	
Housing	CO-EX Extrusion PC Profile	Power	21-54W	Light Output Angle	165°x130°
Side Cover	PC Injection + Silicone Gasket	Power Factor	>0.95	UGR Value	UGR ≤ 22
Diffuser	Batwing Acrylic Lens + PC Opal	Light Source	Mid Power LED	CRI [Ra]	CRI ≥ 80
Inner plate	Aluminum Extrusion	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Product Dimensions [mm]	56(W) x 68(H)	LED Driver	Constant Current		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	L (mm)	Kg
07110.06.30.021	21	2460	165°-130°	3000	580	0,50
07110.06.40.022	21	2520	165°-130°	4000	580	0,50
07110.08.30.030	32	3750	165°-130°	3000	860	0,70
07110.08.40.031	32	3840	165°-130°	4000	860	0,70
07110.12.30.042	43	5050	165°-130°	3000	1140	1,00
07110.12.40.043	43	5160	165°-130°	4000	1140	1,00
07110.14.30.063	54	6350	165°-130°	3000	1420	1,20
07110.14.40.064	54	6480	165°-130°	4000	1420	1,20