

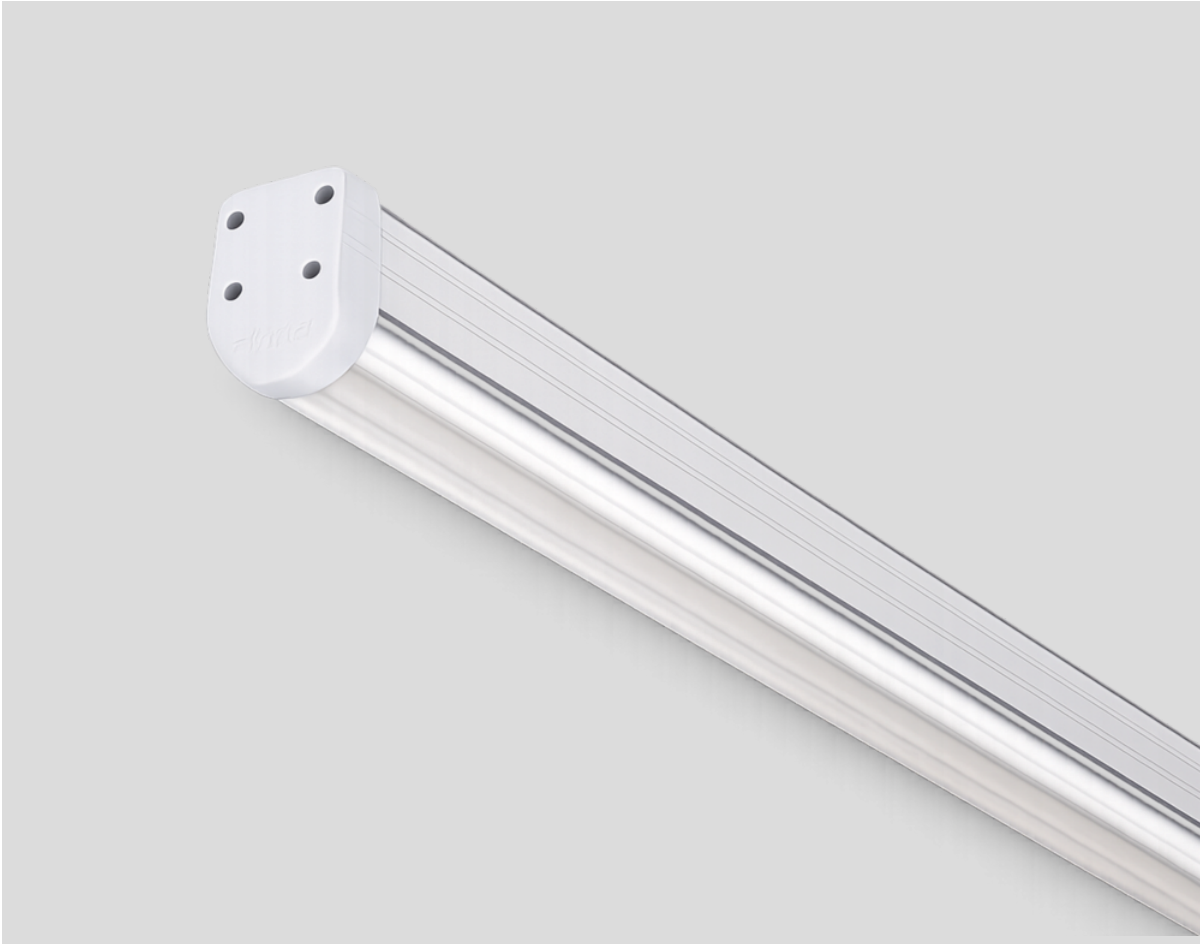


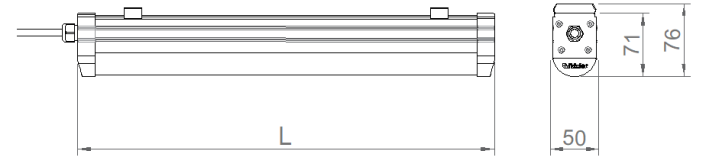

RAL 9006

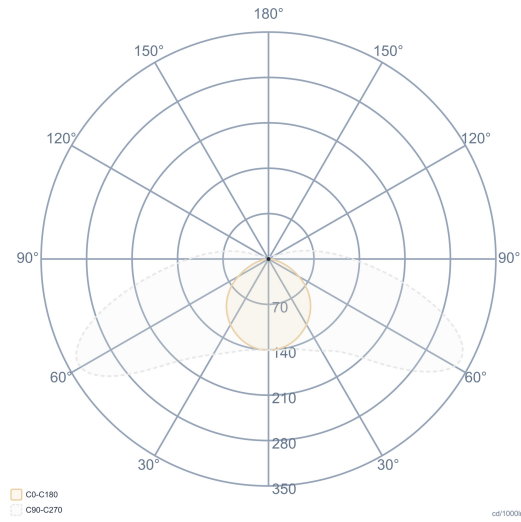

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	21-54W	Light Output Angle	165°x130°
Side Cover	PC Injection + Silicone Gasket	Power Factor	>0.95	UGR Value	UGR ≤ 22
Diffuser	Batwing Acrylic Lens + PC Opal	Light Source	Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Anodized Coating	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Product Dimensions [mm]	50(W) x 71(H)	LED Driver	Constant Current		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	L (mm)	Kg
07112.06.30.021	21	2460	165°-130°	3000	580	0,60
07112.06.40.022	21	2520	165°-130°	4000	580	0,60
07112.08.30.030	32	3750	165°-130°	3000	860	0,80
07112.08.40.031	32	3840	165°-130°	4000	860	0,80
07112.12.30.042	43	5050	165°-130°	3000	1140	1,50
07112.12.40.043	43	5160	165°-130°	4000	1140	1,50
07112.14.30.063	54	6350	165°-130°	3000	1420	1,90
07112.14.40.064	54	6480	165°-130°	4000	1420	1,90