



RAL 9006



SPACE IP65

08131

Protected LED Bar for Harsh Environments

Space IP65, as the high-protection version of the Sinus LED Bar series, is developed for applications requiring resistance to dust and moisture. Its aluminum housing and IP65-protected socket cable connection offer a reliable lighting solution. The LED modules are coated with a special protective resin. This prevents water, moisture, and dust from reaching the LED components, increasing the product's durability and lifespan.

It is an ideal solution, especially for outdoor architectural lighting, facade details, eaves, niche applications, landscape elements, under shelves, corridors, and decorative concealed lighting projects.

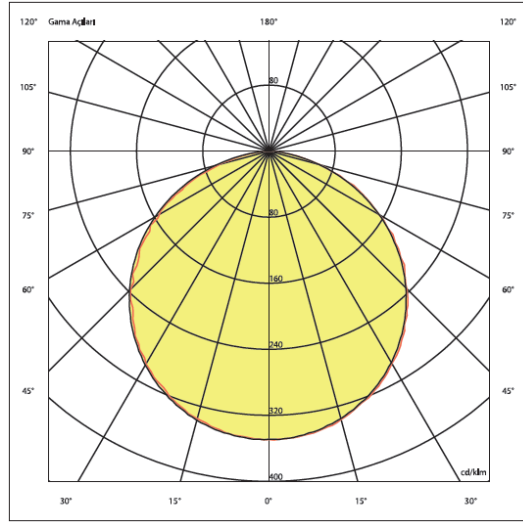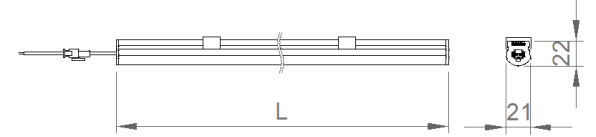

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	7-14W	Light Output Angle	120°
Optics	Extrusion Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Anodized Coating	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	21(W)x515(L)x22(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Surface	LED Driver	Constant Voltage		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>102.000 Hour		

Order Code	W/m	Lm	CCT	WxLxH (mm)	Kg
08131.05.30.007	7	750	3000	21x515x22	0,25
08131.05.40.007	7	780	4000	21x515x22	0,25
08131.10.30.014	14	1400	3000	21x1015x22	0,40
08131.10.40.014	14	1450	4000	21x1015x22	0,40

