




WATERLINE 070-IP54

01193

IP54 Linear Lighting Luminaire

The Waterline 070 Series is an aesthetically pleasing linear lighting solution offering IP54 protection thanks to its special silicone-sealed diffuser design. This unique structure provides high resistance to dust and moisture while creating a homogeneous and comfortable light distribution. Thanks to its double-cover design, the mounting screws are not visible from the outside. The sealing system, compressed with the inner cover, ensures a watertight seal, while the outer cover gives the product a simple and integrated look. A transparent inner cover option allows for uninterrupted lighting in linear applications.

It offers a reliable lighting solution for metro stations, high-speed train platforms, tunnels, pedestrian crossings, and outdoor eaves applications.

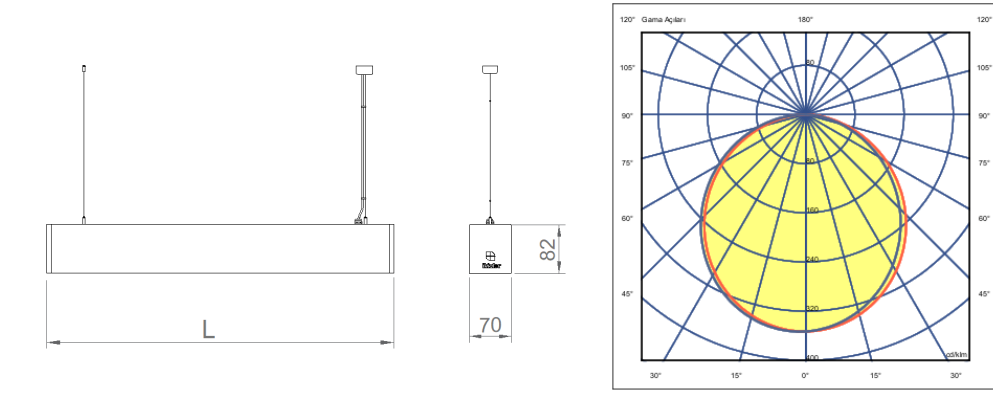

General Information		Electrical Info		Lighting Technology	
Housing	Extruded Aluminum Profile	Power	18-65W	Light Output Angle	110°
Side Cover	PC Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Silicone Sealed Extruded PC	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	70(W) x 82(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Mounting Type	Surface and Pendant	LED Driver	High Efficiency Constant Current Output		
Mounting Part	Height Adjustable Steel Wire, Spring Steel	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour	DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	L (mm)	Kg
01193.78.40.041	38	4100	4000	1145	2,60

