


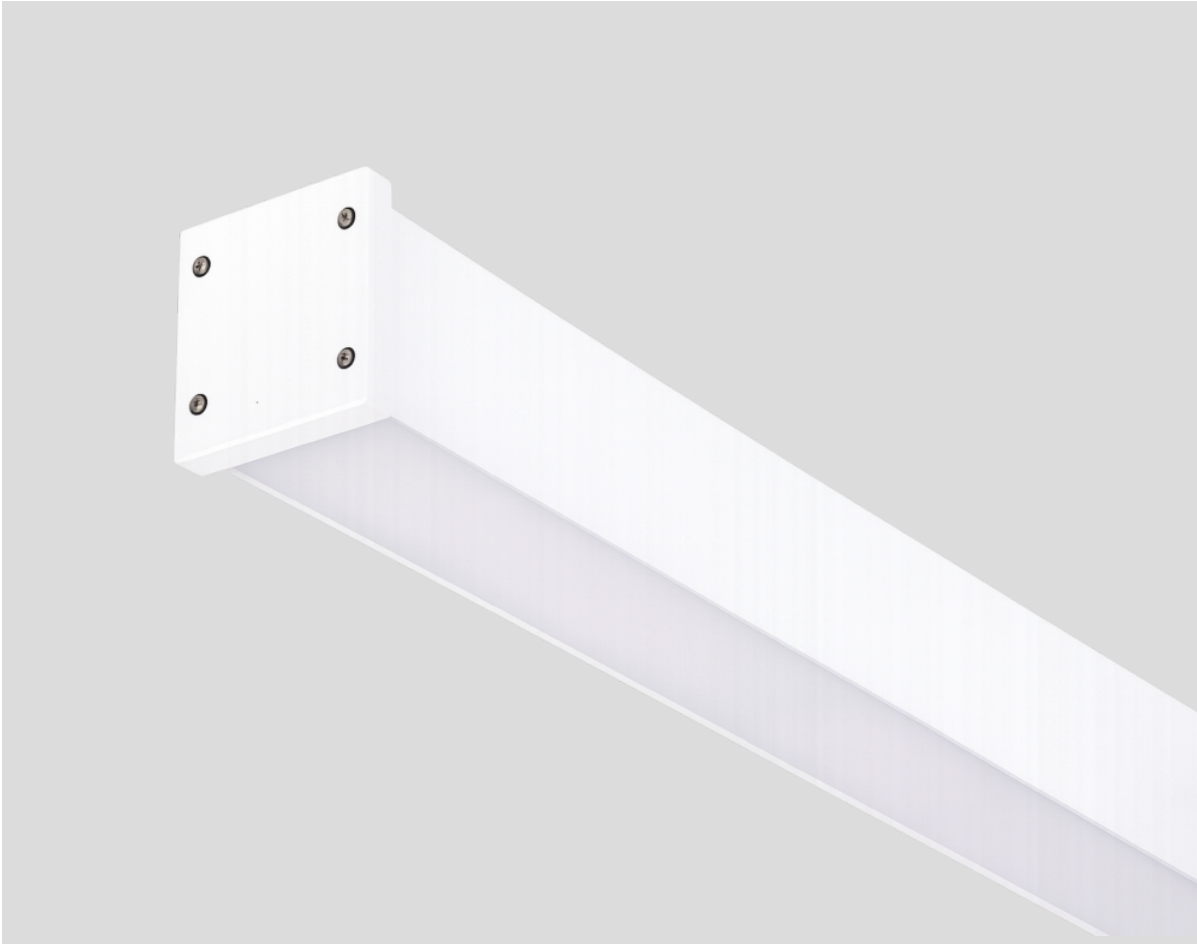



WATERLINE 080-IP65

01194

IP65 Industrial Lighting Luminaire

Waterline 080 Series is a durable lighting solution developed for demanding environments, featuring IP65 and IK10. Its aluminum body and cover construction provide high mechanical strength and long-lasting performance. The specially designed diffuser with an integrated silicone gasket ensures reliable protection against dust and moisture, enabling the luminaire to achieve its IP65 protection rating. At the same time, it delivers uniform and comfortable illumination, enhancing visual comfort.

Metro stations, high-speed rail platforms, tunnels, pedestrian underpasses, parking facilities and industrial environments. With different lengths, color temperature options and control alternatives, it can be adapted to project-specific requirements.

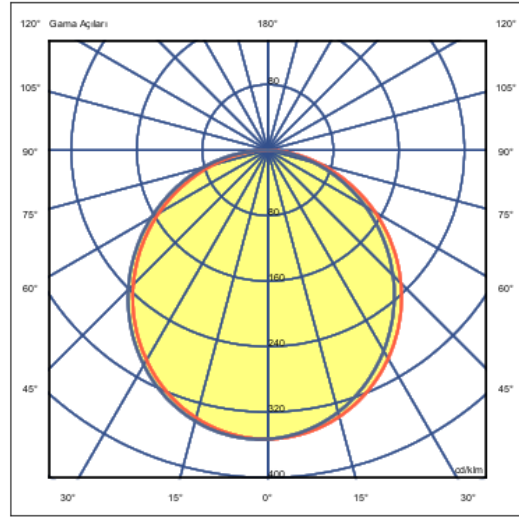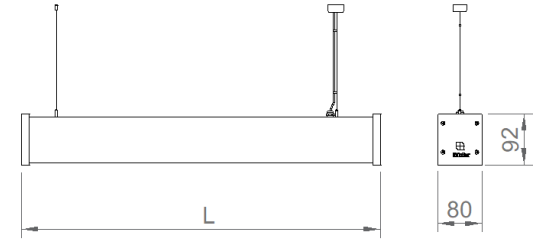

General Information		Electrical Info		Lighting Technology	
Housing	Extruded Aluminum Profile	Power	18-65W	Light Output Angle	110°
Side Cover	Aluminum Injection	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Silicone Sealed Extruded PC	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	80(W) x 92(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Mounting Type	Surface and Pendant	LED Driver	High Efficiency Constant Current Output		
Mounting Part	Height Adjustable Steel Spring + Wire	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>102.000 Saat	DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
01194.89.30.049	46	5000	3000	80x92x1435	3,50

