



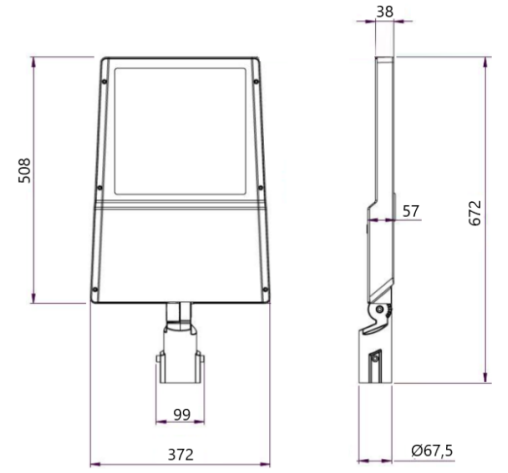

RAL 7016

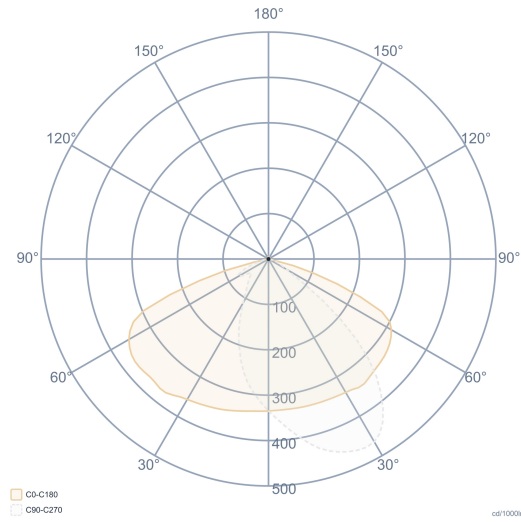

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	200-240W	Light Output Angle	Asymetrical (Optional)
Glass	Tempered Clear Glass	Power Factor	>0.95	CRI [Ra]	CRI ≥ 70
Optics	PMMA Optical Lens	Light Source	SMD High Power LED	Color Bin Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	Cabling	Halojen-Free	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White	
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	372(W)x508(L)x68(H)	LED Driver	Constant Current		
Mounting Type	Surface	Ambient Temperature	-40°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	ØD (Console-mm)	Kg
09495.54.40.280	200	28000	4000	372x508x68	42-60	5,50
09495.54.40.336	240	33600	4000	372x508x68	42-60	5,50