

RAL 7016


LASTING-XL


09495

Smart Lighting for Modern Cities

Lasting-XL is designed for urban roads, main arteries, parking lots, and large outdoor applications. It features a slim and modern housing design, a powerful optical system, and high cooling performance. The aluminum injection housing provides effective heat management, optimizing the operating temperature of the LED and driver components, extending product life, and maintaining high luminous flux for many years.

90° and 180° mounting options allow the same luminaire to be used in both horizontal cantilever and pole-top mounting. This flexible structure facilitates stock management and project implementation by easily adapting to different pole types and site conditions.

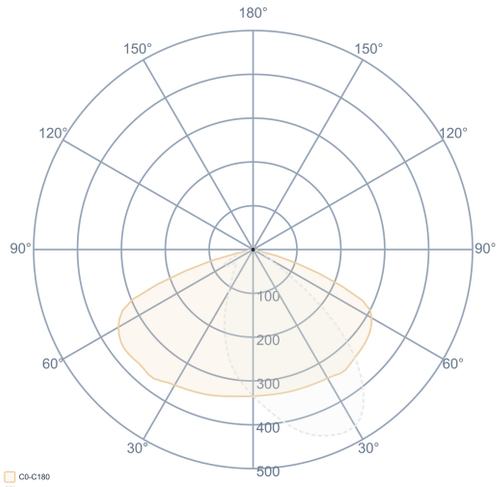

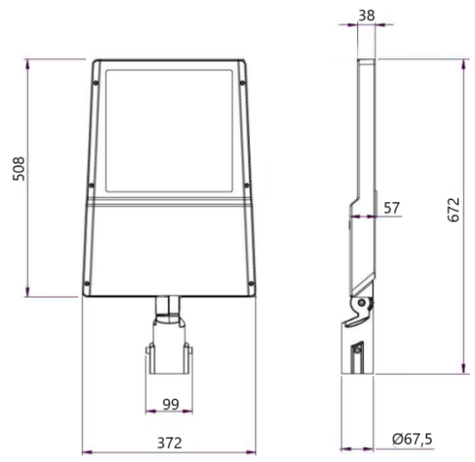

General Information	
Body & Frame	Aluminum Injection
Glass	Tempered Clear Glass
Optics	PMMA Optical Lens
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	372(W)x508(L)x68(H)
Mounting Type	Surface

Electrical Info	
Power	200-240W
Power Factor	>0.95
Light Source	SMD High Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-40°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	Asymetrical (Optional)
CRI [Ra]	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Lm	CCT	WxLxH (mm)	ØD (Console-mm)	Kg
09495.54.40.280	200	28000	4000	372x508x68	42-60	5,50
09495.54.40.336	240	33600	4000	372x508x68	42-60	5,50

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com