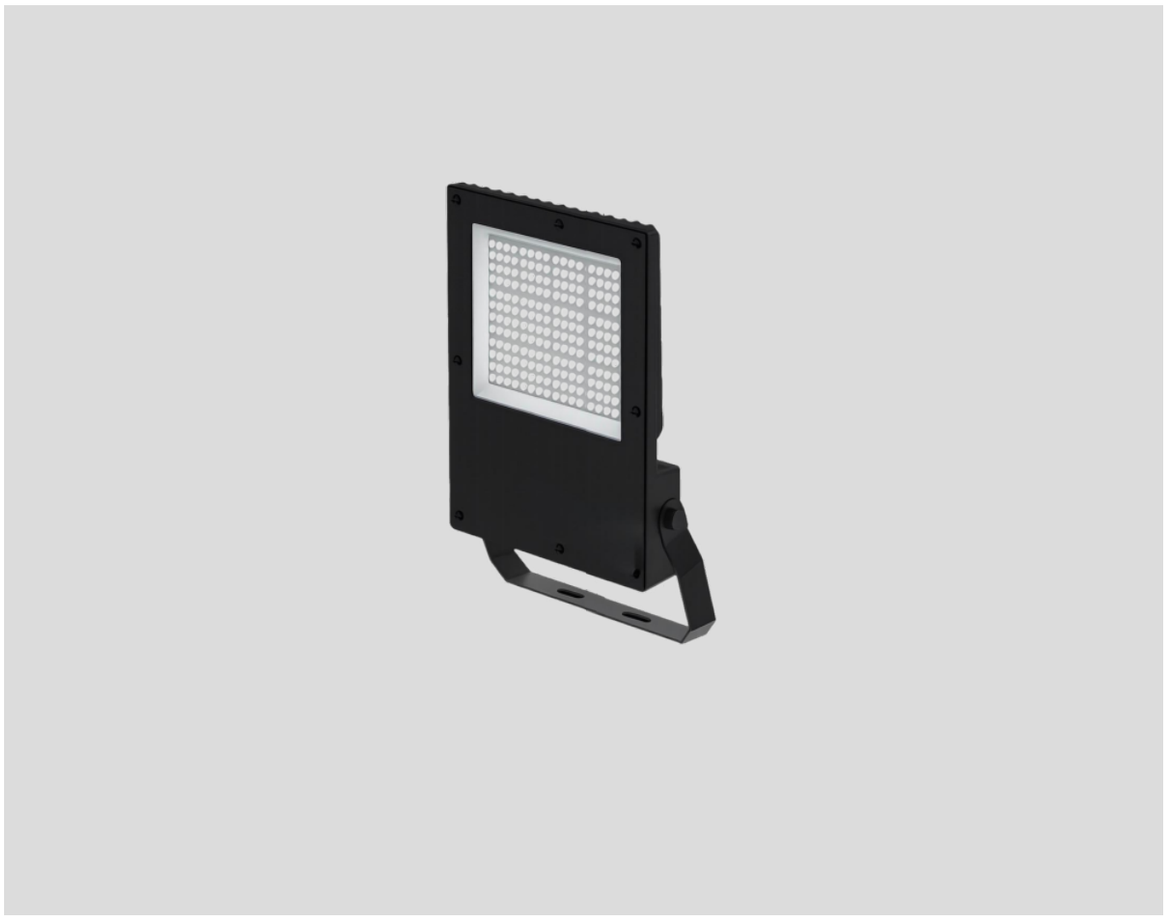

TITAN-M

09294

Small Size, Big Performance

Titan-M is a compact LED floodlight developed for outdoor lighting applications. Its die-cast aluminum housing, tempered clear glass, and efficient acrylic optical lens system direct light to the target surface in a controlled and efficient manner. With 30°, 60°, 90°, 120°, and asymmetrical light distribution options, it offers a single product solution for different project needs.

Thanks to its IP66 protection class and durable electrostatically powder-coated housing, it ensures long-lasting use in harsh outdoor conditions. Its compact size, easy installation, and high optical performance make it a reliable solution for building facades, landscape areas, walkways, perimeter lighting, and small-scale architectural accent applications.

RAL 7016

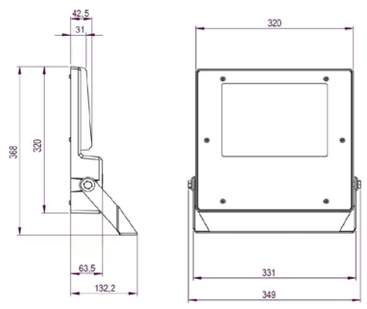

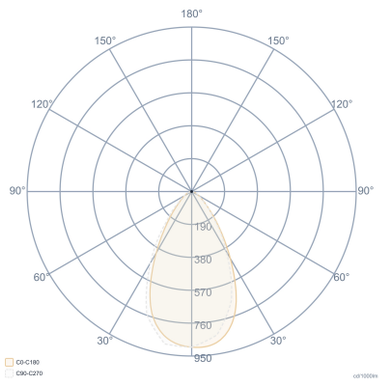

General Information		Electrical Info		Lighting Technology	
Body & Frame	Die-cast Aluminum	**Power**	100-150W	**Light Output Angle**	30°,60°,90°,120°,ASYM
Optics	Acrylic Lens	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Glass	Tempered Clear Glass	**Light Source**	SMD High Power LED	**CRI [Ra]**	CRI ≥ 70
Gasket	Transparent Silicone	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	**Input Voltage**	220-240V AC / 50-60 Hz		
Insulation Class	Class I	**LED Driver**	Constant Current		
Product Dimensions [mm]	386(W)x320(L)x63(H)	**Ambient Temperature**	-20°C / +50°C		
Mounting Type	Surface	**LED Lifetime L70**	>50.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
09245.32.40.140	100	14000	4000	386x320x63	4,40
09294.23.40.045	125	17500	4000	386x320x63	4,40
09294.23.40.100	150	21000	4000	386x320x63	4,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com