


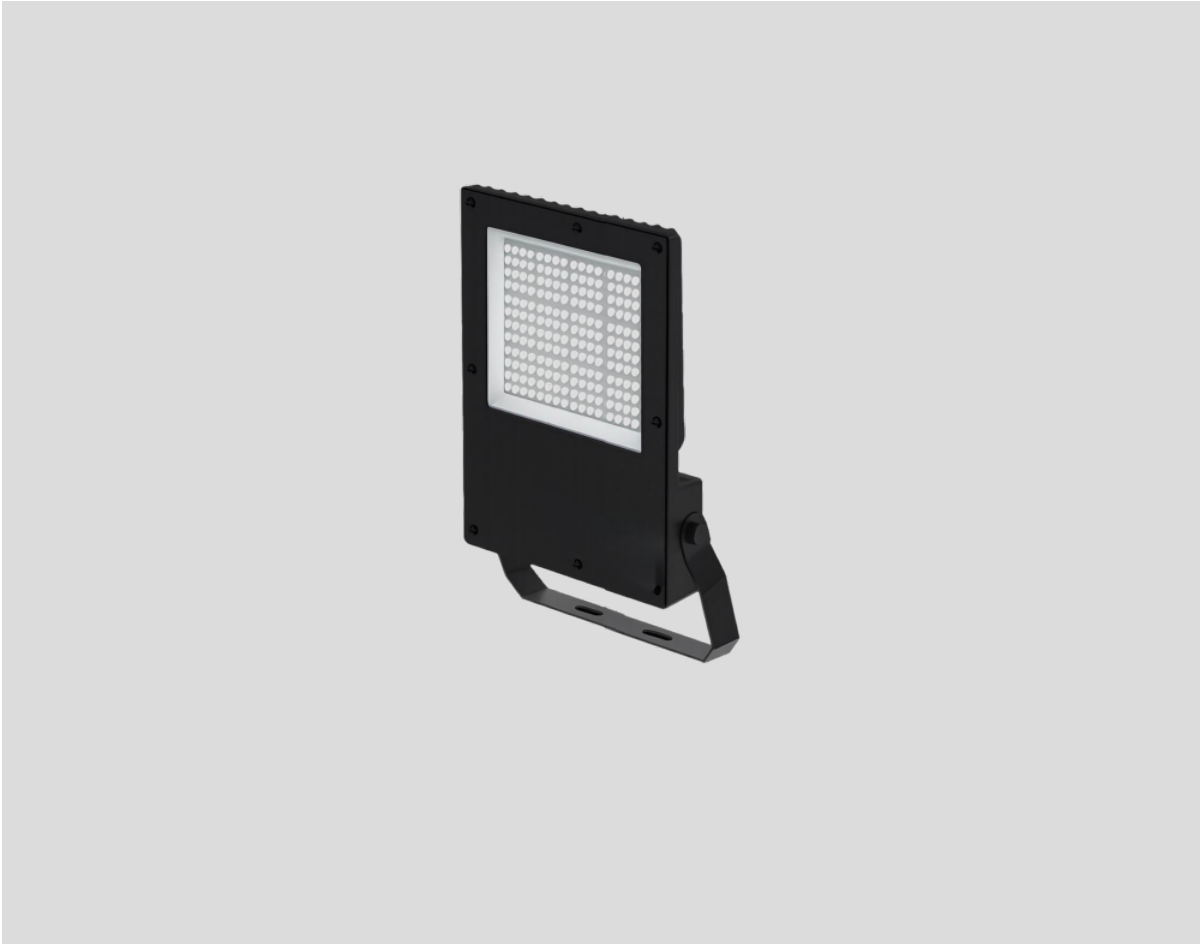

TITAN-M

09294



Small Size, Big Performance

Titan-M is a compact LED floodlight developed for outdoor lighting applications. Its die-cast aluminum housing, tempered clear glass, and efficient acrylic optical lens system direct light to the target surface in a controlled and efficient manner. With 30°, 60°, 90°, 120°, and asymmetrical light distribution options, it offers a single product solution for different project needs.

Thanks to its IP66 protection class and durable electrostatically powder-coated housing, it ensures long-lasting use in harsh outdoor conditions. Its compact size, easy installation, and high optical performance make it a reliable solution for building facades, landscape areas, walkways, perimeter lighting, and small-scale architectural accent applications.



RAL 7016

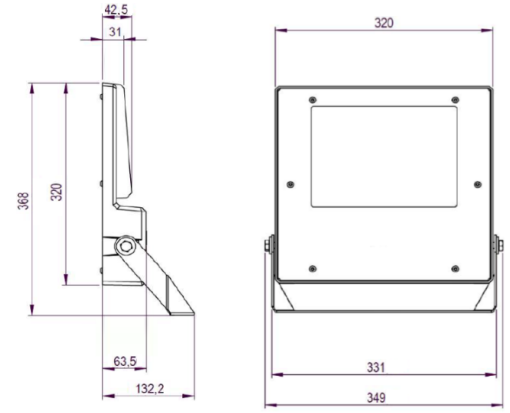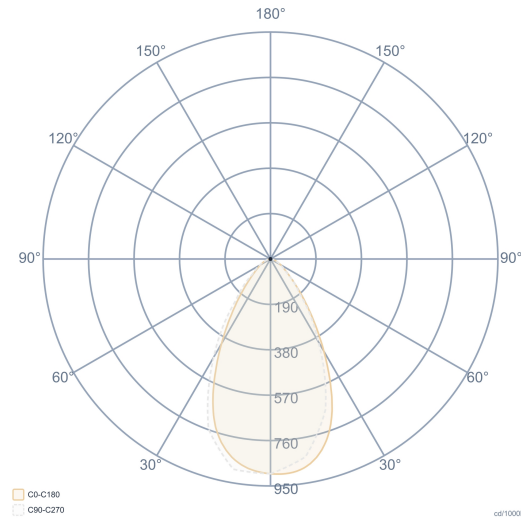

General Information		Electrical Info		Lighting Technology	
Body & Frame	Die-cast Aluminum	Power	100-150W	Light Output Angle	30°,60°,90°,120°,ASYM
Optics	Acrylic Lens	Power Factor	>0.95	UGR Value	UGR ≤ 22
Glass	Tempered Clear Glass	Light Source	SMD High Power LED	CRI [Ra]	CRI ≥ 70
Gasket	Transparent Silicone	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Insulation Class	Class I	LED Driver	Constant Current		
Product Dimensions [mm]	386(W)x320(L)x63(H)	Ambient Temperature	-20°C / +50°C		
Mounting Type	Surface	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
09245.32.40.140	100	14000	4000	386x320x63	4,40
09245.32.40.175	125	17500	4000	386x320x63	4,40
09245.32.40.210	150	21000	4000	386x320x63	4,40

