


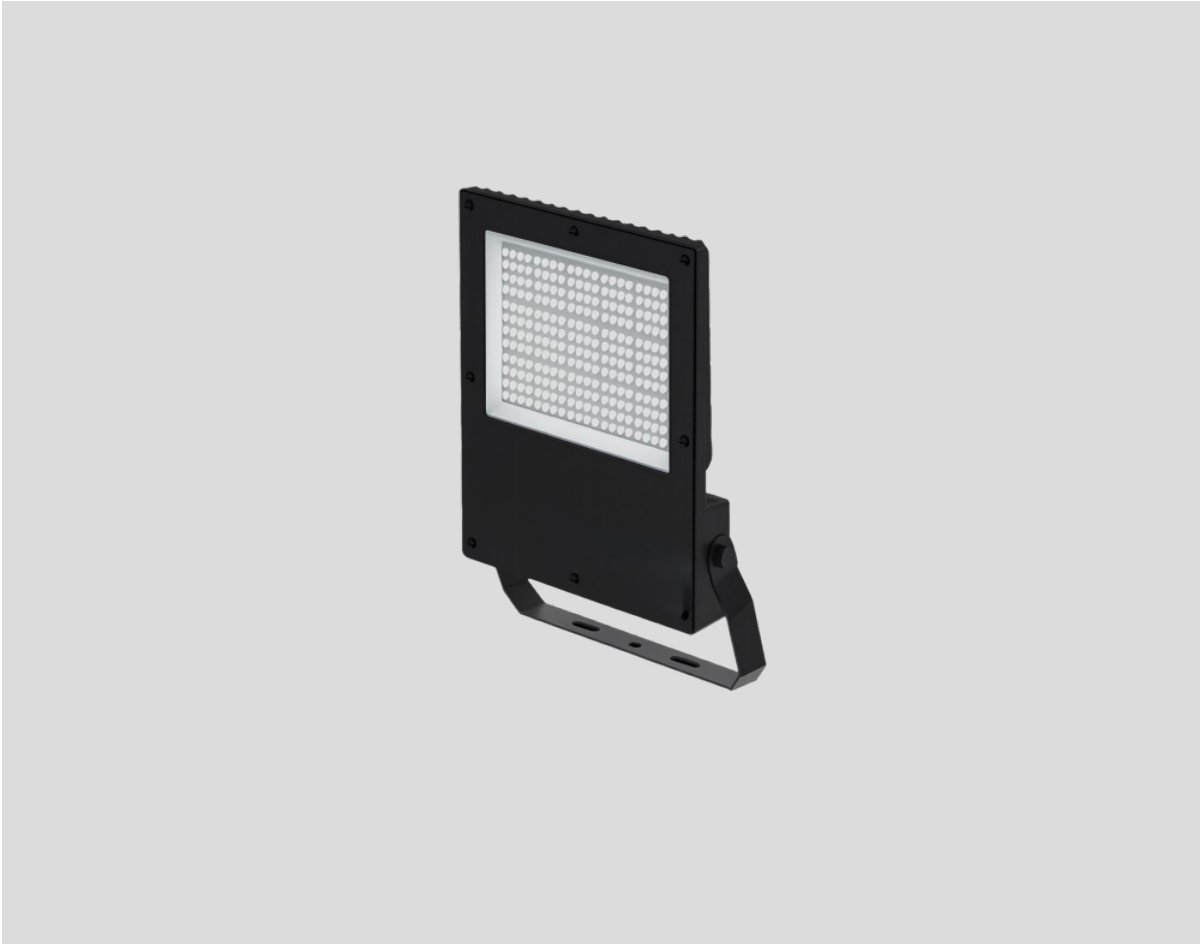

RAL 7016



TITAN-L

09294

Strong Light, Controlled Distribution

Titan-L is a compact LED floodlight developed for outdoor lighting applications. Its die-cast aluminum housing, tempered clear glass, and efficient acrylic optical lens system direct light to the target surface in a controlled and efficient manner. With 30°, 60°, 90°, 120°, and asymmetrical light distribution options, it offers a single product solution for different project needs.

Thanks to its IP66 protection class and durable electrostatic powder-coated housing, it ensures long-lasting use in harsh outdoor conditions. With its easy installation and high optical performance, it is a reliable solution for building facades, landscape areas, walkways, perimeter lighting, and architectural accent applications.

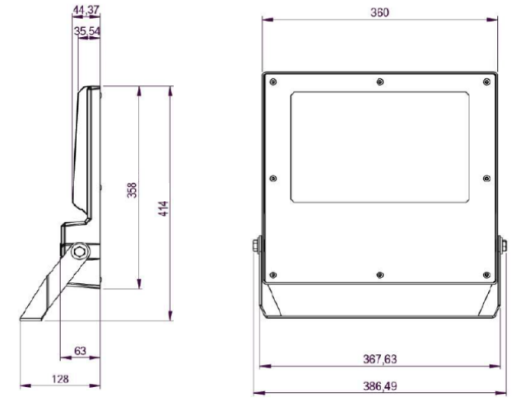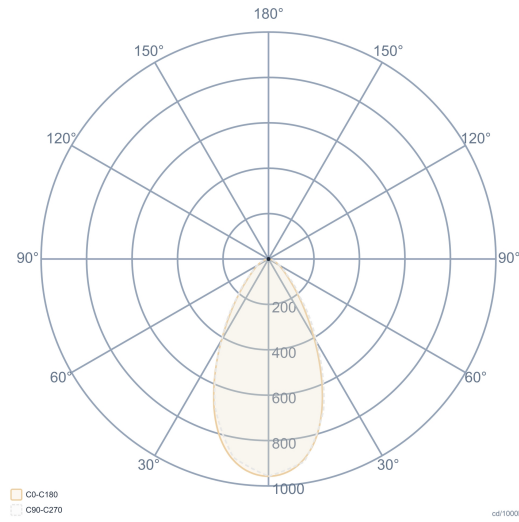

General Information		Electrical Info		Lighting Technology	
Body & Frame	Die-cast Aluminum Body	Power	200-240W	Light Output Angle	18°,40°.60°,90°,ASYM
Optics	Acrylic Lens	Power Factor	>0.95	UGR Value	UGR ≤ 22
Glass	Tempered Clear Glass	Light Source	SMD High Power LED	CRI [Ra]	CRI ≥ 70
Gasket	Transparent Silicone	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Paint	Electrostatic Powder Paint	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Insulation Class	Class I	LED Driver	Constant Current		
Product Dimensions [mm]	386(W)x415(L)x63(H)	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
Mounting Type	Surface				
Mounting Part	Metal Console				

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
09246.43.40.280	200	28000	4000	386x415x63	7,80
09246.43.40.312	240	31200	4000	386x415x63	7,80

