

VOLTAR IP65

07307


One luminaire, maximum flexibility.


Voltar is a highbay luminaire that provides powerful and controlled lighting in high-ceilinged and high-volume industrial areas. Its aluminum injection-molded housing, IP65 protection class, and IK10 impact resistance ensure it adapts to demanding operating conditions.

Thanks to 60°, 90°, and 110° optical options, it allows for light direction according to different ceiling heights and usage scenarios. It offers approximately 16,000–29,600 lm of luminous flux with 100W, 150W, and 200W power options.

It provides a reliable and flexible lighting solution for large and high-volume areas such as warehouses, factories, gymnasiums, and tunnels.

RAL 9005

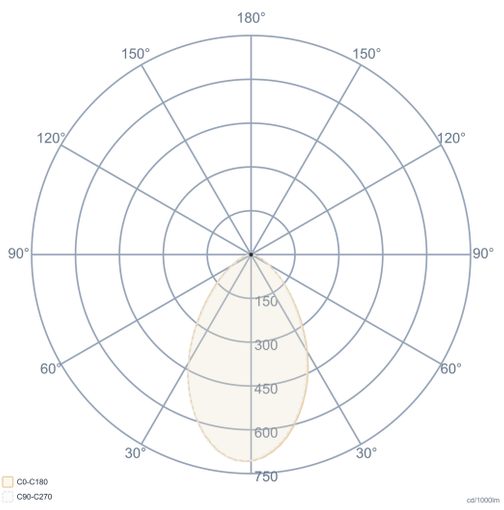

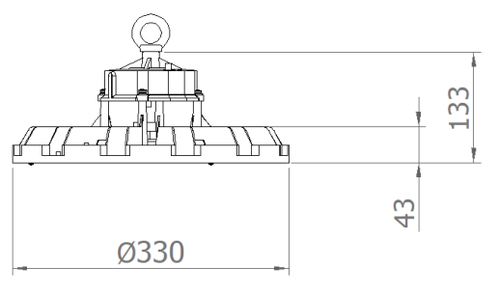

General Information	
Housing	Aluminum Injection
Optics	Clear Lens
Gasket	Transparent Silicone
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø330
Mounting Type	Surface and Pendant
Mounting Part	Metal Bracket or Hanging Chain

Electrical Info	
Power	100-200W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	60°,90°,110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	Angle	(Ø) (mm)	Kg
07307.33.40.160/60	100	16000	4000	60°	Ø330	2,60
07307.33.40.161/90	100	16150	4000	90°	Ø330	2,60
07307.33.40.158/110	100	15840	4000	110°	Ø330	2,60
07307.33.40.231/60	150	23100	4000	60°	Ø330	2,60
07307.33.40.233/90	150	23350	4000	90°	Ø330	2,60
07307.33.40.227/110	150	22750	4000	110°	Ø330	2,60
07307.33.40.294/60	200	29460	4000	60°	Ø330	2,60
07307.33.40.296/90	200	29600	4000	90°	Ø330	2,60
07307.33.40.289/110	200	28960	4000	110°	Ø330	2,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com