



RAL 9005

VOLTAR IP65



07306

One luminaire, maximum flexibility.

Voltar is a highbay luminaire that provides powerful and controlled lighting in high-ceilinged and high-volume industrial areas. Its aluminum injection-molded housing, IP65 protection class, and IK10 impact resistance ensure it adapts to demanding operating conditions.

Thanks to 60°, 90°, and 110° optical options, it allows for light direction according to different ceiling heights and usage scenarios. It offers approximately 16,000-29,600 lm of luminous flux with 100W, 150W, and 200W power options.

It provides a reliable and flexible lighting solution for large and high-volume areas such as warehouses, factories, gymnasiums, and tunnels.

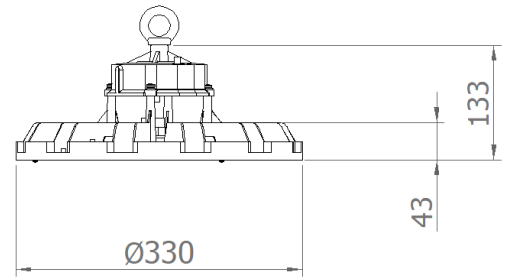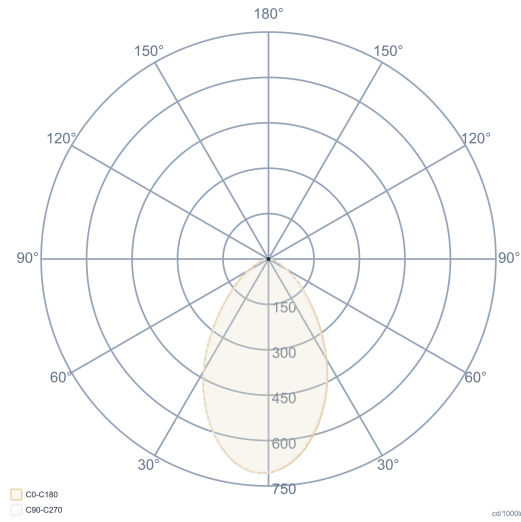

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Injection	Power	100-150W	Light Output Angle	60°,90°,110°
Optics	Clear Lens	Power Factor	>0.95	UGR Value	UGR ≤ 22
Gasket	Transparent Silicone	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	Ø330	LED Driver	Constant Current		
		Ambient Temperature	-20°C / +50°C		
Mounting Type	Surface and Pendant	LED Lifetime L70	>50.000 Hour		
Mounting Part	Metal Bracket or Hanging Chain				

Order Code	W	Lm	CCT	Angle	(Ø) (mm)	Kg
07307.33.40.168/60	100	16000	4000	60°	Ø330	2,60
07307.33.40.170/90	100	16150	4000	90°	Ø330	2,60
07307.33.40.167/110	100	15840	4000	110°	Ø330	2,60
07307.33.40.244/60	150	23100	4000	60°	Ø330	2,60
07307.33.40.248/90	150	23350	4000	90°	Ø330	2,60
07307.33.40.243/110	150	22750	4000	110°	Ø330	2,60
07307.33.40.316/60	200	29460	4000	60°	Ø330	2,60
07307.33.40.320/90	200	29600	4000	90°	Ø330	2,60
07307.33.40.315/110	200	28960	4000	110°	Ø330	2,60

