VOLTAR IP65

07306

One luminaire, maximum flexibility.

Voltar is a highbay luminaire that provides powerful and controlled lighting in high-ceilinged and high-volume industrial areas. Its aluminum injection-molded housing, IP65 protection class, and IK10 impact resistance ensure it adapts to demanding operating conditions.

Thanks to 60°, 90°, and 110° optical options, it allows for light direction according to different ceiling heights and usage scenarios. It offers approximately 16,000–29,600 lm of luminous flux with 100W, 150W, and 200W power options.

It provides a reliable and flexible lighting solution for large and high-volume areas such as warehouses, factories, gymnasiums, and tunnels.

RAL 9005

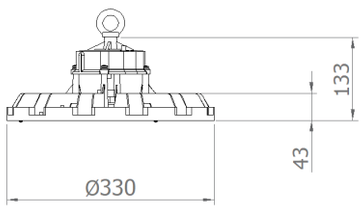

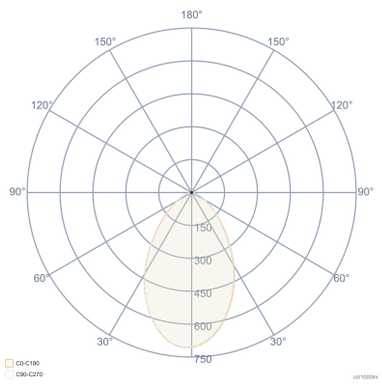

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Injection	**Power**	100-150W	**Light Output Angle**	60°,90°,110°
Optics	Clear Lens	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Gasket	Transparent Silicone	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Paint	Electrostatic Powder Paint	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Insulation Class	Class I	**Input Voltage**	220-240V AC / 50-60 Hz		
Product Dimensions [mm]	Ø330	**LED Driver**	Constant Current		
Mounting Type	Surface and Pendant	**Ambient Temperature**	-20°C / +50°C		
Mounting Part	Metal Bracket or Hanging Chain	**LED Lifetime L70**	>50.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	Angle	(Ø) (mm)	Kg

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com