



RAL 9005

VOLTAR IP65



07306

One luminaire, maximum flexibility.

Voltar is a highbay luminaire that provides powerful and controlled lighting in high-ceilinged and high-volume industrial areas. Its aluminum injection-molded housing, IP65 protection class, and IK10 impact resistance ensure it adapts to demanding operating conditions.

Thanks to 60°, 90°, and 110° optical options, it allows for light direction according to different ceiling heights and usage scenarios. It offers approximately 16,000-29,600 lm of luminous flux with 100W, 150W, and 200W power options.

It provides a reliable and flexible lighting solution for large and high-volume areas such as warehouses, factories, gymnasiums, and tunnels.

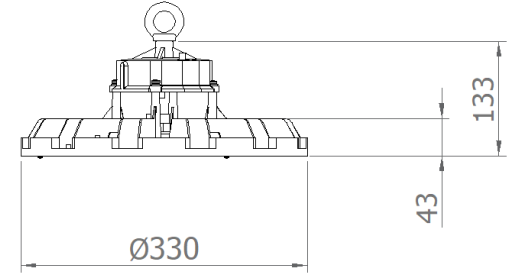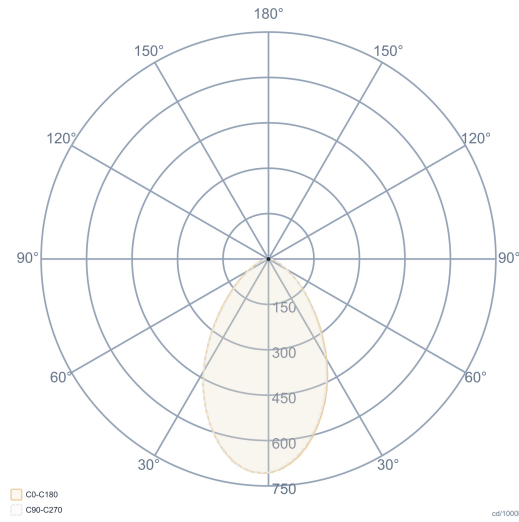

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Injection	Power	100-150W	Light Output Angle	60°,90°,110°
Optics	Clear Lens	Power Factor	>0.95	UGR Value	UGR ≤ 22
Gasket	Transparent Silicone	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Product Dimensions [mm]	Ø330	LED Driver	Constant Current		
Mounting Type	Surface and Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Metal Bracket or Hanging Chain	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	Angle	(Ø) (mm)	Kg
------------	---	----	-----	-------	------------	----

